


29 Series Pneumatic Quick Coupling (Steel Zinc Plated) Instant Air Couplings and Adaptors, Swivel Adaptors

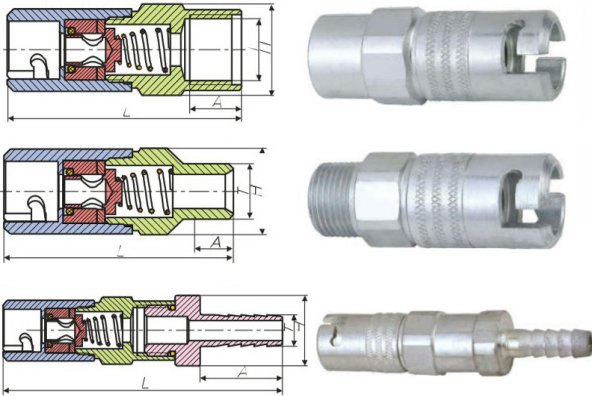


Couplings

	Part Number:	Size	L	A	T
Female A	PFSFC2914	04SF	57	11	1/4" BSPP
	PFSFC2938	06SF	57	12	3/8" BSPP

Male B	PFSMC2914	04SM	57	11	1/4" BSPP
	PFSMC2938	06SM	57	12	3/8" BSPP

Hose Tail	PFSHC2914	04SH	91	25	1/4" H
	PFSHC29516	05SH	95	29	5/16" H
	PFSHC2938	06SH	95	29	3/8" H

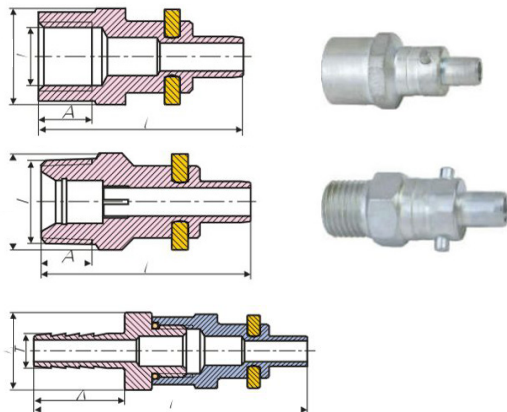


Fixed Plugs

	Part Number:	Size	L	A	T
Female A	PFSFP2914	04PF	41.5	11	1/4" BSPP
	PFSFP2938	06PF	42.5	12	3/8" BSPP

Male B	PFSMP2914	04PM	41.5	11	1/4" BSPP
	PFSMP2938	06PM	42.5	12	3/8" BSPP

Hose Tail	PFSHP2914	04PH	75	25	1/4" H
	PFSHP29516	05PH	79	29	5/16" H
	PFSHP2938	06PH	79	29	3/8" H

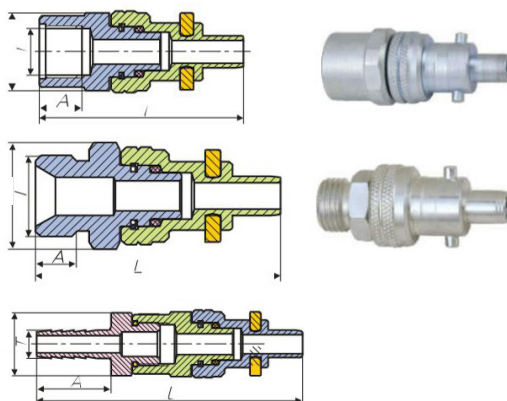

Swivel

	Part Number:	Size	L	A	T
Female A	PFSFSP2914	04SPF	51.3	11	1/4" BSPP
	PFSFSP2938	06SPF	52.3	12	3/8" BSPP

Male B	PFSFSP2914	04SPM	46.8	6.5	1/4" BSPP
	PFSFSP2938	06SPM	48.8	8.5	3/8" BSPP

Hose Tail	PFSFSP2914	04SPH	83.8	25	1/4" H
	PFSFSP29516	05SPH	89.3	29	5/16" H
	PFSFSP2938	06SPH	89.3	29	3/8" H

Applications:

This coupling system has a safety lock. To disconnect, the plug must first be twisted out from the coupling before it can be unlocked. This prevents unintentional disconnection.

Temperature Range:

-20°C/+100°C/-4°F/+212°F
With standard seals: Buna-N(Nitrile)

Rated Pressure: 250PSI

Material:

Coupler Body: Steel
Springs: AISI302
Seals: Buna-N(Nitrile)
Plug: Steel

Locking Device: Instant air coupling and adaptors

Attention: Only plug and socket with the same thread fit together.