

Fuel & Oils

HOZELOCK
 TRICOFLEX

Tricofuel

All Fuel Lines

- For pumps, circulation pumps, burners, vine heaters
- For frost prevention, heating equipment...
- Transfer of certain chemical products : petrols, certain acids and certain bases, oils, alcohols (not suitable for aromatic hydrocarbons)

All Sectors of Activity

- Automotive industry, assembly plants, plastics industry, food production industry, construction
- Garages (for cars, lorries & agricultural machinery)
- Woodworking, etc...

Advantages

The composition of Tricofuel hose material compound is designed specially for hydrocarbon transfer. Thus, it retains its flexibility, even after intensive use. It withstands repeated bending, whilst also offering excellent resistance to ageing. The clear aspect of both the core and the coating provides for easy visual control of fluids transfer.



Chemical Resistance


See table column B.

Connectors

Band, worm drive, screw or 'O' ring clamps.

Swaged fittings can be used if they do not damage the hose.

-20°C to +90°C

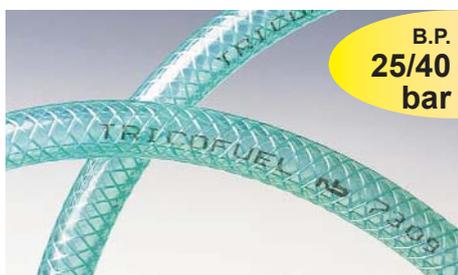

Transparent hose for hydrocarbons

Three layer design, with two clear PVC layers sandwiched around a polyester fibre braiding.



- 1 Flexible clear green PVC outer coating hydrocarbons resistant
- 2 Fibre reinforcement
- 3 Smooth clear green PVC core

Marking : TRICOFUEL [batch number]

mm	± mm	mm	± mm	mm	g/m	Bar	mm	Green 25 m	
6,3	+/- 0,3	11	+/- 0,3	2,35	81	40	13	44	TRI-050985
8	+/- 0,5	14	+/- 0,5	3	129	40	13	56	TRI-051162
10	+/- 0,5	16	+/- 0,5	3	152	30	10	70	TRI-051246
12	+/- 0,6	19	+/- 0,6	3,5	211	30	10	84	TRI-051204
15	+/- 0,6	23	+/- 0,6	4	297	30	10	105	TRI-052274
20	+/- 0,8	28	+/- 0,8	4	373	30	10	140	TRI-052680
25	+/- 0,8	32,5	+/- 0,8	3,75	420	25	8	175	TRI-050843
30	+/- 1,0	39	+/- 1,0	4,5	603	25	8	210	TRI-052883