

# ST124HDMI2

## 4-Port HDMI 1.3 Video Splitter with Audio

StarTech.com

Hard-to-find made easy

## Installation Guide

### Packaging Contents

- 1 x ST124HDMI2 splitter
- 1 x Power Adapter
- 1 x Installation Guide

### System Requirements

- HDMI enabled display devices (e.g. monitor, HDTV, etc)
- HDMI enabled video source (e.g. computer, PVR/DVR, etc)
- Available AC power outlet

### Installation

1. Make sure all displays and the video source device are turned off before installing.
2. Connect an HDMI cable (not included) from each of the video display devices (e.g. monitor, HDTV, etc) to the numbered output HDMI connectors on the video splitter.

**NOTE:** Port 1 is the primary output so EDID information will be taken from there. The capabilities of the display on Port 1 will be applied to all other ports so be careful not to exceed the capabilities of the other displays.

3. If connecting audio separately from HDMI, connect speakers to the corresponding 3.5mm audio outputs.
4. Connect an HDMI cable (not included) from the video source device (e.g. computer, PVR/DVR, etc) to the 'SOURCE' input HDMI connector on the video splitter.
5. If connecting audio separately from HDMI, connect the audio source to the input 3.5mm audio connector.
6. Connect the included power adapter to the video splitter.
7. Turn on the display devices, followed by the video source. The video output should be displayed on all connected display devices.



#### Warranty Information

This product is backed by a one year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

#### Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

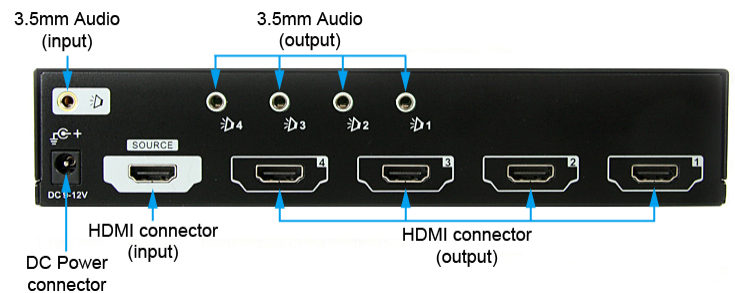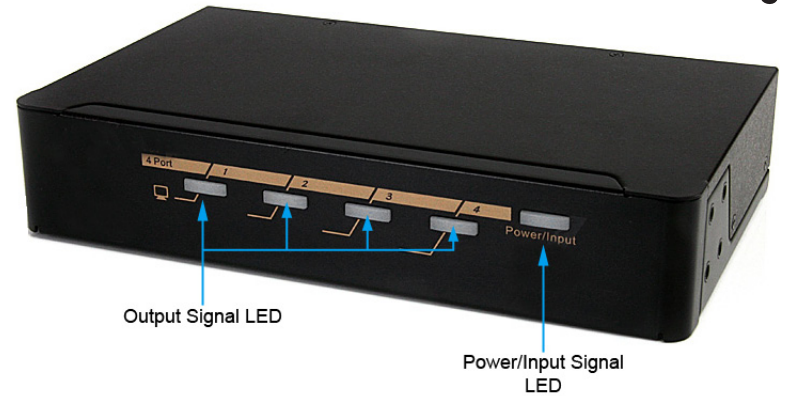

\*actual product may vary from photos

### Specifications

<b>Video Signal</b>	High Speed HDMI (HDMI 1.3)
<b>Connectors</b>	1 x HDMI female (input) 4 x HDMI female (output) 1 x 3.5mm mini-jack Audio (input) 4 x 3.5mm mini-jack Audio (output) 1 x DC Power
<b>LEDs</b>	1 x Power/Signal Input 4 x Signal Output
<b>Maximum Video Resolution</b>	1920x1200 / 1080p
<b>Maximum Cable Distance</b>	5 m
<b>Audio Support</b>	Yes
<b>HDCP Support</b>	Yes
<b>DDC/EDID Support</b>	Yes
<b>Power Adapter</b>	9~12VDC, 1500mA, center positive
<b>Enclosure Material</b>	Metal
<b>Operating Temperature</b>	0°C ~ 40°C (32°F ~ 104°F)
<b>Storage Temperature</b>	-20°C ~ 60°C (-4°F ~ 140°F)
<b>Humidity</b>	0% ~ 80%
<b>Dimensions</b>	220.0mm x 135.0mm x 44.0mm
<b>Weight</b>	1074 g

Manual Revision:11/05/2010

For the most up-to-date information, please visit [www.startech.com](http://www.startech.com)