


simon

TOMA R-TV/SAT

TOMADA R-TV+SAT
PRISE R-TV+SAT
R-TV+SAT SOCKET
РОЗЕТКА R-TV+SAT
R-TV+SAT مقبس

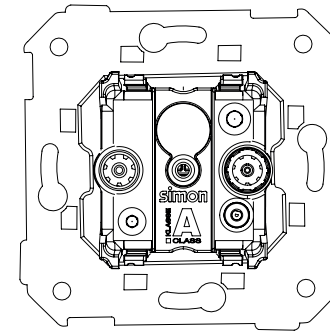

7546x-69

Características Técnicas

Características Técnicas

Caractéristiques Techniques

Technical specifications

Технические Характеристики

مميزات تقنية

SHIELDING CLASS A CLASS	IMPEDANCE Ω 75	OUTPUT CONNECTORS EC F/TV MALE SAT FEMALE	R-TV 47-862 MHz	SAT 950-2150 MHz
40°C 0°C	95%	IP20	EAC	CE







Made in Morocco

SIMON, S.A. Diputación, 390-392 / 08013 Barcelona Atención Técnica al Cliente - Customer Technical Support: simonmail@simon.es Tel: 902109700
<http://www.simonelectric.com>

Krızanovskogo 15/5, office 316, Moscow, Russia, 117218 Tel. +7(495)646-84-00 Techhelp@simonelectric.ru, тел:8 (800) 250 06 78
<http://www.simonelectric.ru>



B990952 03/12/18

simon

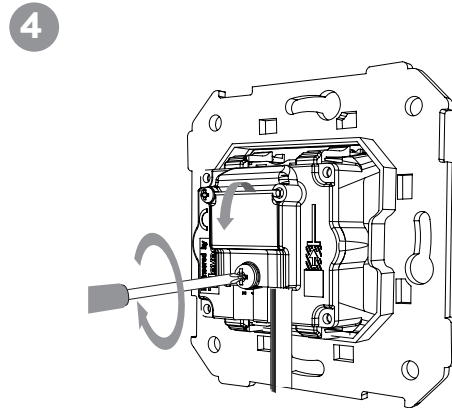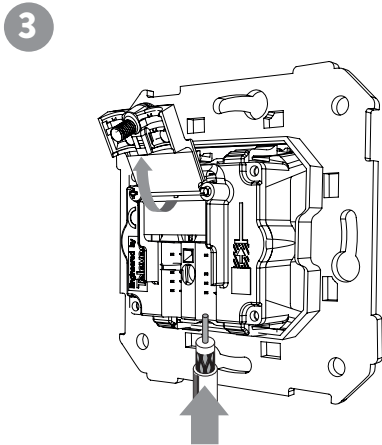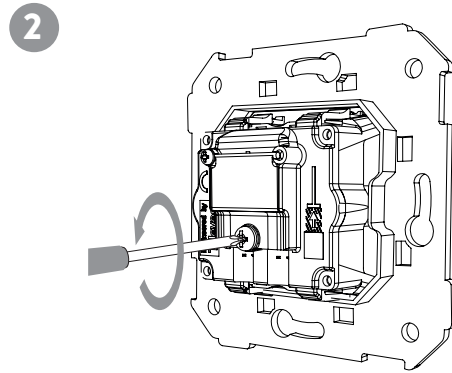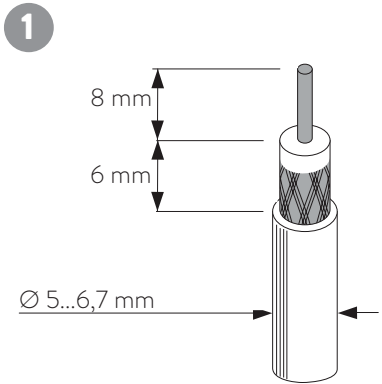

	Art.	75466-69	75467-69	75468-69
		Intermedia/Intermédia/Intermédiaire متوسط/Промежуточная/متوسط	Final/Final/Finale/Final /كونحائية/نهائي	Única/Única/Únique Single/Единая/فردية
Atenuación IN-> OUT (dB) Atenuação IN-> OUT (dB) Atténuation IN-> OUT (dB) Attenuation IN-> OUT (dB) затухание IN-> OUT (dB) التوهين IN-> OUT (ديسيبل)	FM/TV	3,5 typical	-	-
	TV/SAT	5 typical	-	-
Atenuación IN-> FM/TV (dB) Atenuação IN-> FM/TV (dB) Atténuation IN-> FM/TV (dB) Attenuation IN-> FM/TV (dB) затухание IN-> FM/TV (dB) التوهين IN-> FM/TV (ديسيبل)	FM/TV	7,5 typical	4 typical	0,6 typical (<2,5 in 862MHz)
	TV/SAT	10,5 typical	5 typical	-
Atenuación IN-> SAT (dB) Atenuação IN-> SAT (dB) Atténuation IN-> SAT (dB) Attenuation IN-> SAT (dB) затухание IN-> SAT (dB) التوهين IN-> SAT (ديسيبل)	FM/TV	8,5 typical	4 typical	-
	TV/SAT	9 typical	5 typical	1,5 typical (<2,8 in 950MHz)
Aislamiento FM/TV - SAT (dB) Isolamento FM/TV - SAT (dB) Isolament FM/TV - SAT (dB) Isolation FM/TV - SAT (dB) Изоляция FM/TV - SAT (dB) العزل FM/TV - SAT (ديسيبل)	FM/TV	>25	>10	>10
	TV/SAT	>20	>20	>8
Blindaje VHF, UHF, SAT Blindagem VHF, UHF, SAT Blindage VHF, UHF, SAT Shielding VHF, UHF, SAT Экранирование VHF, UHF, SAT الحجب بتردد عال جداً، تردد فوق العالي، حد الضغط العالي	Clase A (EN50083-2)			
Impedancia (Ω) Impedância (Ω) Impédance (Ω) Impedance (Ω) Импеданс (Ω) المقاومة	75			
Conectores de salida Conectores de saia Connecteurs de sortie Output connectors Выходные выключатели موصلات الإخراج	IEC 60169-2	FM/TV SAT	MACHO / MACHO / MÂLE / MALE R-TV / ВИЛочная часть/R-TV تَكَر HEMBA / FÊMEA / FEMELLE / FEMALE SAT / ГНЕЗДОВОЙ КОНТАКТ SAT أنثى	
Banda de frecuencia Banda de frequência Bande de fréquence Frequency band Диапазон частот نطاق التردد	FM/TV	47...862 MHz		
	SAT	950...2150 MHz		


Centralización Serie 27 y 82 / Serie 44 Aqua
Cajas de superficie Serie 27 / Cima 500 / Scudo

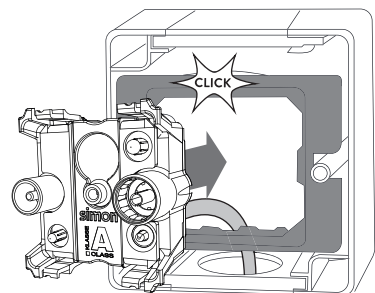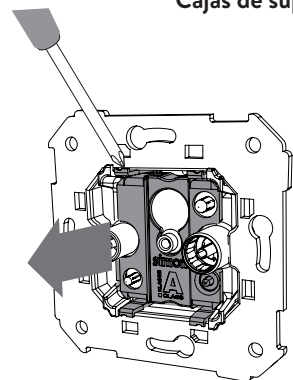

Ejemplo / Exemplo / Exemple / Example / Пример / مثال
Serie 44 Aqua

ESQUEMA DE CONEXIÓN - ESQUEMA DE CONEXÃO - SCHÉMA DE CONNEXION
CONNECTION LAYOUT - СХЕМА ПОДКЛЮЧЕНИЯ - مخطط الإيصال

En serie o cascada / Conexão serial
Connexion série / Serial connection
Последовательное соединение
إيصال تسلسلي

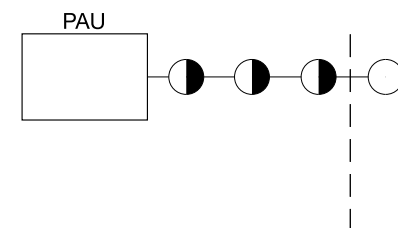

En estrella / ligação em estrela
Connexion en étoile / Star connection
Соединение звездой
إيصال نجمي

