

## 2-way switch 10A 250V~ for half element with fast terminal connection system white Simon 27 Play

REF. 27201-64



## BASIC INFORMATION

### DESCRIPTION

2-way switch of 10AX and 250V of voltage in white colour of the Simon 27 Play series. It has a quick terminal connection and its type of operation is tilting. As far as its installation is concerned, you must perform or on the surface-mounted or by recessed. This 2-way switch is fully compatible with the frames Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralizations and Simon 44 Aqua and offers the possibility of replacing the finish of the supplied rocker with 5 additional finishes available. It measures 22.5x45 mm and is made of metal components with halogen-free thermoplastic insulation and thermoset trim and according to the following standards EN 60669-1: 1999 + A1: 2002 + A2: 2008 + EN 50581: 2051. It works perfectly in rooms with a temperature located between 5 and 40°C, although it is capable of withstanding extreme temperatures of -25 to 50°C, approximately. To clean it, need a soft, dry cloth and never use abrasive cleaners with chlorine.

### FINISH

White

### COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

### PACKAGING CONTENTS

Mechanism with rocker

### ETIM CLASS

EC001590

### REMARKS

Possibility of substituting the finish of the rocker supplied with a different one. 5 additional finishes available.

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### CURRENT (A)

10 AX

### NOMINAL VOLTAGE (V~)

250 V~

### CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

### IP RATING

IP21

### OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

### NUMBER OF POSSIBLE ELEMENTS

Half element

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

### INDICATOR FUNCTION

No

### TYPE OF MECHANISM

Pivoting

### VERSION

Single

## INSTALLATION AND MAINTENANCE

### CABLE STRIPPING NECESSARY (MM)

11

### CLAW

Simon 27

### INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American, Small  
spaces and Centralisations

### INSTALLATION DIRECTION

Horizontal, Vertical

### INSTALLATION TYPE

Suitable for surface and flush  
mounting

### TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

## REGULATIONS

### REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053251768

### UNITARY PACKAGING HEIGHT

22.6

### UNITARY PACKAGING WIDTH

38.1

### UNITARY PACKAGING LENGTH

45.5

### UNITARY PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING VOLUME

0.039

### UNITARY PACKAGING VOLUME UNIT

MMQ

### UNITARY PACKAGING GROSS WEIGHT

0.024

### PRODUCT NET WEIGHT

0.024

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8421053035528

### UNITS CONTAINED PACKAGING

20

### PACKAGING HEIGHT

53

### PACKAGING WIDTH

105

### PACKAGING LENGTH

220

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

1.224

### PACKAGING VOLUME UNIT

DMQ

### PACKAGING GROSS WEIGHT

0.481

### PACKAGING NET WEIGHT


0.48

### PACKAGING WEIGHT UNIT


KGM

## MECANISMOS SIMON 27, 28 Y 44


### Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch  
XX00101-XX




Pulsador / Push button switch  
XX00150-XX



Interrupor bipolar / Double pole switch  
XX00133-XX




Conmutador / 2-way switch  
XX00201-XX

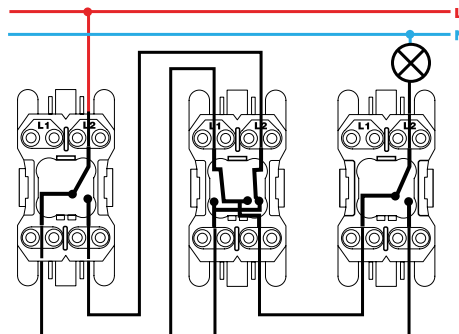


Conmutador cruce / Intermediate switch  
XX00251-XX


### Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch  
XX00102-XX




Interrupor bipolar / Double pole switch  
XX00134-XX

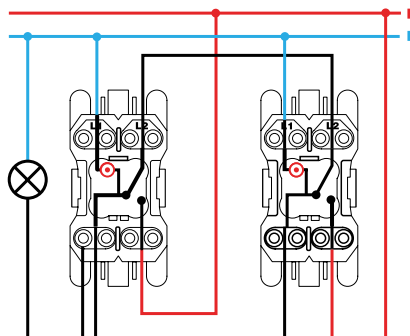


Conmutador / 2-way switch  
XX00202-XX




Interrupor unipolar / Single-pole switch  
XX00104-XX



Pulsador / Push button switch  
XX00160-XX




Conmutador / 2-way switch  
XX2700204-XX

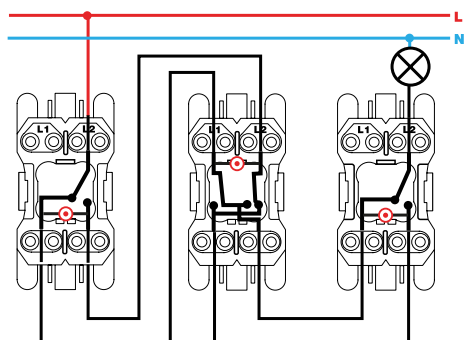


Conmutador cruce / Intermediate switch  
XX2700254-XX

## VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO

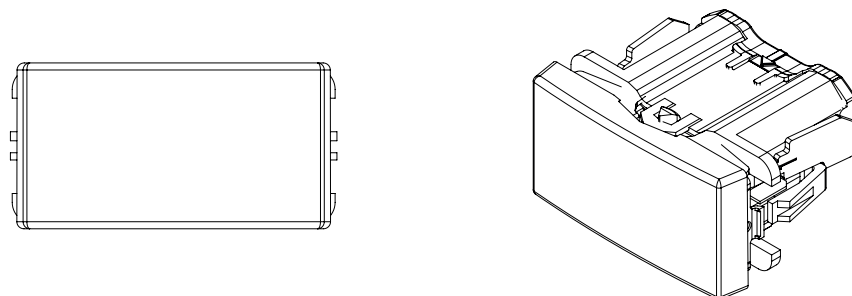

## DIAGRAMA DE MONTAJE

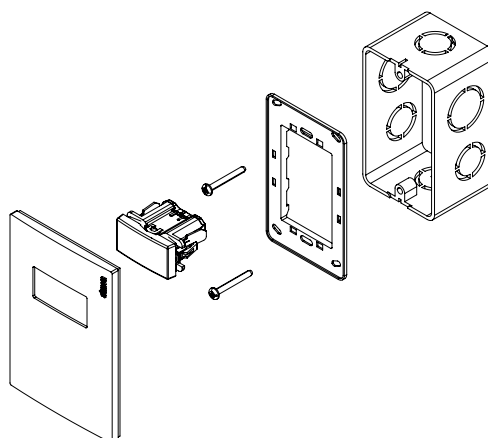

\*Placa y chasis NO incluidos

## DIAGRAMA DE CONEXIÓN

