iO 1-10V dimmer switch 230 V~ bronze Simon 270

REF. **21000317-097**

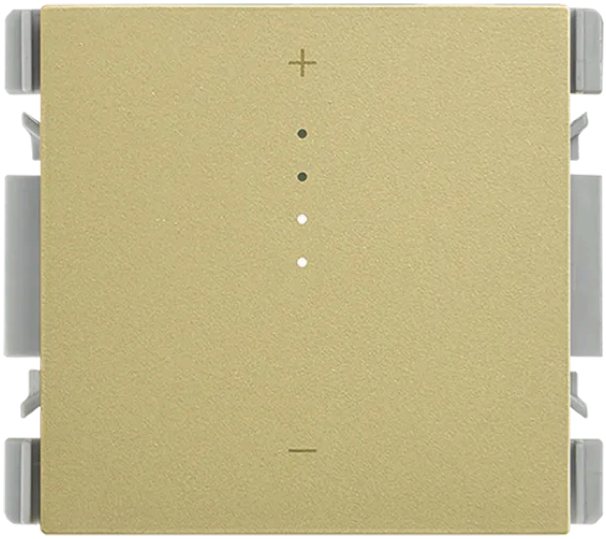

BASIC INFORMATION

DESCRIPTION

Discover the Simon iO blinds switch with slender rocker 700 VA bronze Simon 270 from the Simon 270 series. A product designed to deliver functionality, compatibility and style for residential and commercial installations.

FINISH

Bronze

MATERIAL

Plastic,Metal,FR4

ETIM CLASS

EC000025

SYMBOL

"+/-"

COMPATIBILITY

Wide design frames Simon 270

REMARKS

It allows both dimming of the light level and switching the luminaire on and off. It has an input for load management by means of push buttons (art. 2000x150-09x): up to 5 push buttons can be installed with a maximum cable distance of 75 m. It is not compatible with illuminated push buttons.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

NUMBER OF SWITCHES
1

POWER SUPPLY (V~)
230 V~

FREQUENCY
50 - 60 Hz

IP RATING
IP20

RAL
3033

INDICATOR FUNCTION
Yes

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VOLTAGE (V~)
230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
7

INSTALLATION DIRECTION
Horizontal

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

REGULATIONS

REGULATIONS
Dir. 2011/65/UE RoHS + post. mod.|Dir. 2014/53/UE RED|EN 50428:2005 |EN 50428:2005 A1:2007 |EN 50428:2005 A2:2009 |EN IEC 63000:2018 |ETSI EN 300328 V2.2.2

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053300428

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.077

PRODUCT NET WEIGHT
0.065

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053300428

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
82

PACKAGING WIDTH
54.5

PACKAGING LENGTH
56.5

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
252498.5

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.077

PACKAGING NET WEIGHT
0.065

PACKAGING WEIGHT UNIT
KGM

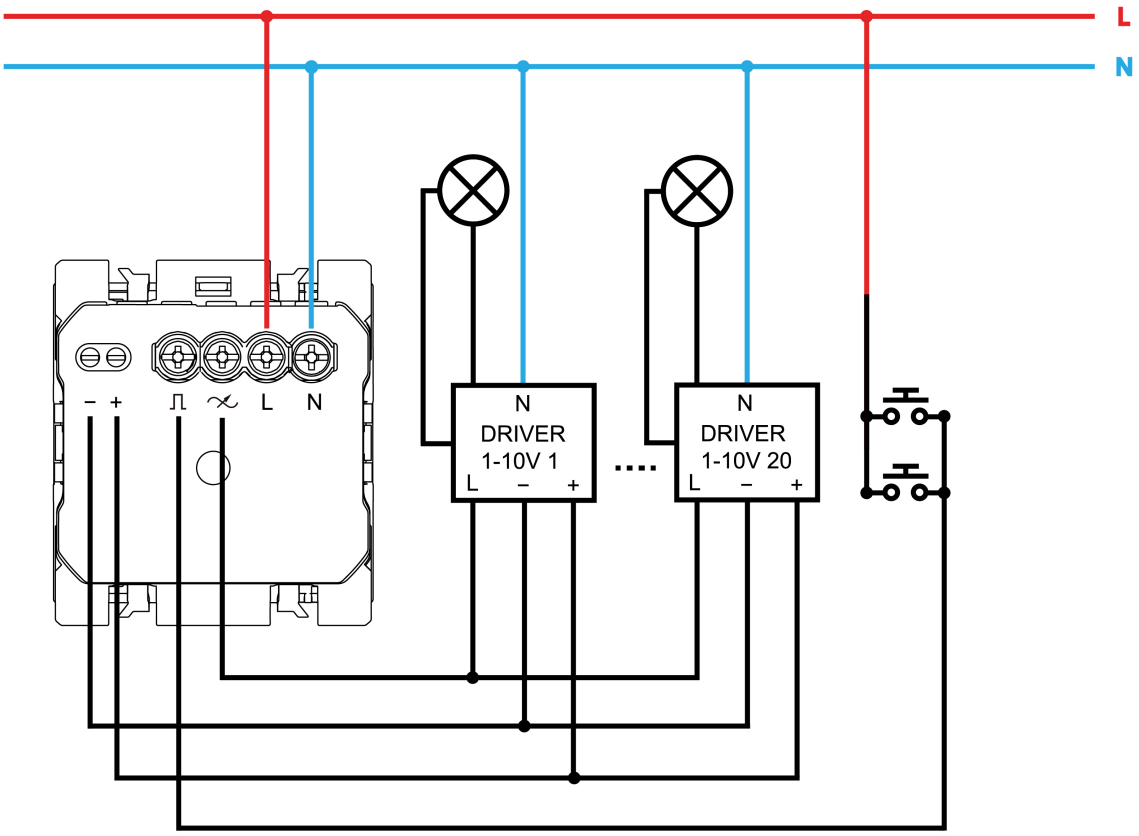

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet