

¡Advertencia!


- Durante la instalación asegúrese que la alimentación eléctrica esté desconectada.
- Las luminarias deben ser instaladas por un electricista cualificado y cumpliendo todas las normas y regulaciones, tanto nacionales como locales, sobre instalaciones eléctricas.
- La fuente de luz y las piezas de la luminaria no son reemplazables. Cuando la fuente de luz y las piezas lleguen al final de su vida útil, la luminaria completa debe reemplazarse.
- No exponer el producto a la lluvia o a ambientes de humedad alta. ¡Uso interior solamente!
- Evitar mirar directamente a la fuente de luz (LEDs) para prevenir deslumbramientos u otras molestias.
- Dispositivos sensibles a descargas electrostáticas. (ESD). Manipular con las precauciones necesarias para evitarlas.
- No usar productos químicos o abrasivos para limpiar el producto. Usar solamente una gamuza suave. No arañar la superficie.
- Un montaje incorrecto puede causar averías.
- Simon no se hace responsable de cualquier uso indebido del producto.

Warning!

- During the installation make sure power is OFF.
- Fixtures must be installed by a qualified electrician in accordance with all national and local electrical and construction codes and regulations.
- The light source and parts of this luminaries are not replaceable. When the light source and parts reach the end of their life,the whole luminaries should be replaced.
- Do not expose the product to the rain or high humidity environment. Indoor use only!
- Avoid looking directly to the LEDs light source to prevent dazzling or another annoyances.
- Electrostatic sensitive devices (ESD). Handle with necessary precautions to avoid ESD.
- Do not use chemicals or abrasives to clean this product. Use soft mat only. Avoid scratch the surface.
- Incorrect assembly can cause malfunction.
- Simon is not responsible of any incorrect use of the product.

Proyector 665

Spotlight 665



6650003x-597 / 6650103x-597

Características Técnicas
Technical features

			6650003x-597 35W PF>0,9	6650103x-597 25W PF>0,9	 3000lm	3000K 3500K 4000K
CRI 90	100-240V~ 50/60Hz	ON-OFF	 20°	 60°	 355°	1,2 Kg
	IP40	IK06	 Ta Máx 35°C			

Acabados
Finishes

Blanco / White
Negro / Black







SIMON LIGHTING, S.A.U. P.O.B. 08093,08080 Barcelona (+34) 651 761 346 (SPAIN)
SIMON INTERNATIONAL, S.A. Zone industrielle Gzenaya. Lot 152/160 Route de Rabat / 90024 Tanger (+212) 39393434 (MOROCCO)
TECNOWATT ILUMINAÇÃO LTDA / Rua trajano de Araujo Viana, 1228 Cinco - Contagem/MG CEP 32010-090 (+55) 3133598225 (BRAZIL)
SIMON ELECTRICA, S.A. Darwin, 136, Anzures / 11590 México, D.F (+52) 55457865 (MEXICO)
SIMON ELECTRIC (CHINA) CO., LTD. No. 1 Ximeng Road / 226600 Hain, Jiangse (+86) 51388917291 (CHINA)
INDO SIMON ELECTRIC PVT. LTD. B-88, Sector-83, Noida / 201305 Uttar Pradesh (+91) 1203096700 (INDIA)
KONTAKT-SIMON S.A. ul. Bestwińska, 21 /43-500 Czechowice-Dziedzice (+48) 323246300 (POLAND)
Customer technical support: sat@simon.es tel: (+34) 651 761 346 - www.simonelectric.com

B992421 16-07-2026




Instalación - Installation


Dimensiones - Dimensions

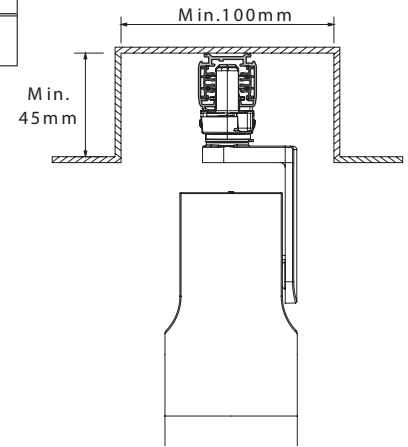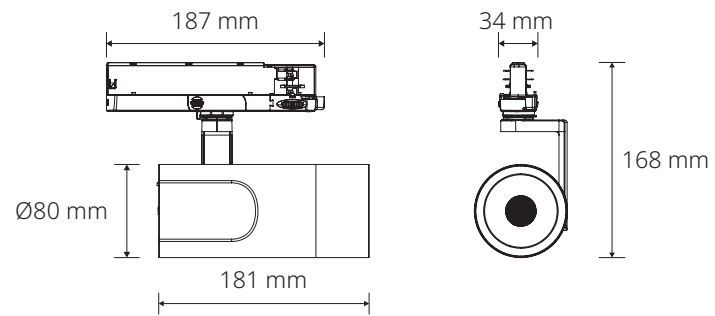


1

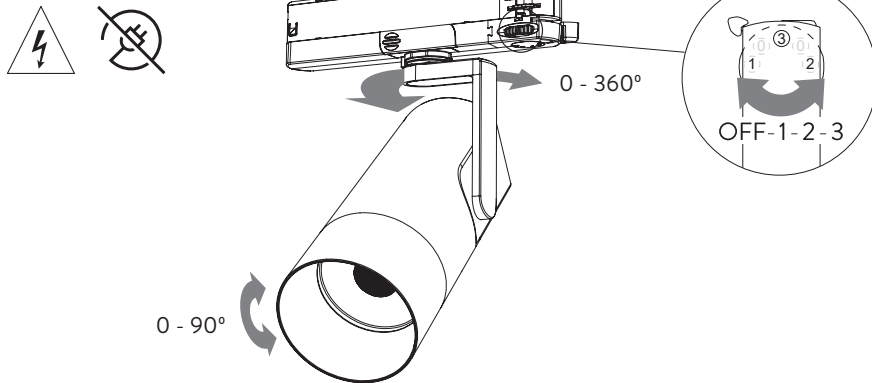


2

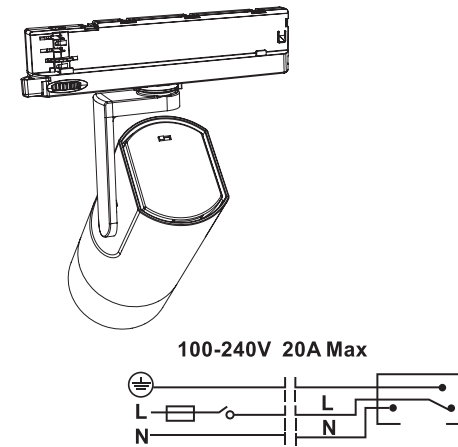

3

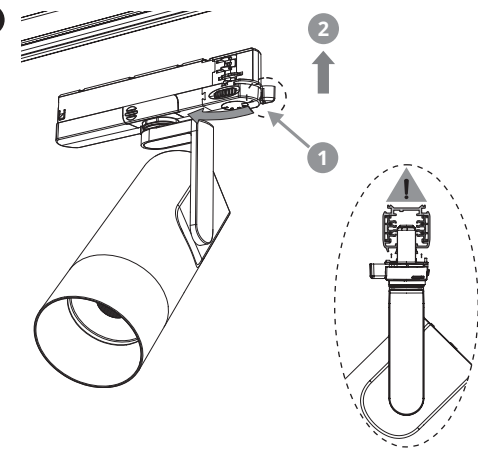

4

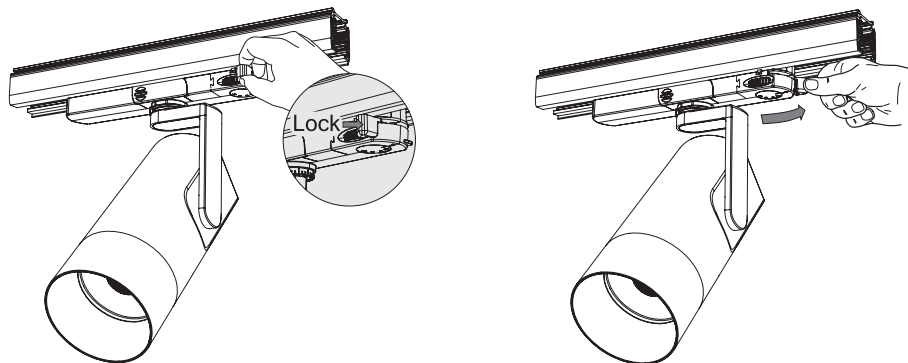

Desmontaje - Disassembly

