

Simon iO electronic DALI dimmer switch 230 V~ with slender rocker champagne Simon 270

REF. 21001316-094



BASIC INFORMATION

FINISH

Matt champagne

MATERIAL

Thermoplastic

PACKAGING CONTENTS

Dimmer switch and instruction sheet

SYMBOL

"+/-"

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC000025

REMARKS

Communication via Broadcast to ensure uniform configuration across all luminaires. It does not allow individual control of devices. No DALI source required.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

POWER SUPPLY (V~)

230 V~

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

RAL

7048

NUMBER OF POSSIBLE ELEMENTS

1 element

STORAGE TEMPERATURE RANGE (°C)

0 - 35 °C

FREQUENCY

50 - 60 Hz

TYPE OF MECHANISM

Dimmer

VOLTAGE (V~)

127/230 V~

INDICATOR FUNCTION

Yes

OPERATING TEMPERATURE RANGE (°C)

5 - 45 °C

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for flush mounting

INSTALLATION DIRECTION

Horizontal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2011/65/UE RoHS + post. mod. | Dir. 2014/53/UE RED | EN 50428:2005 | EN 50428:2005 A1:2007 | EN 50428:2005 A2:2009 | EN IEC 63000:2018 | ETSI EN 300328 V2.2.2

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053286500

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.078

PRODUCT NET WEIGHT

0.078

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053286500

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

81

PACKAGING WIDTH

55.5

PACKAGING LENGTH

55.5

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

249500.25

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT


0.082

PACKAGING NET WEIGHT

0.078

PACKAGING WEIGHT UNIT

KGM

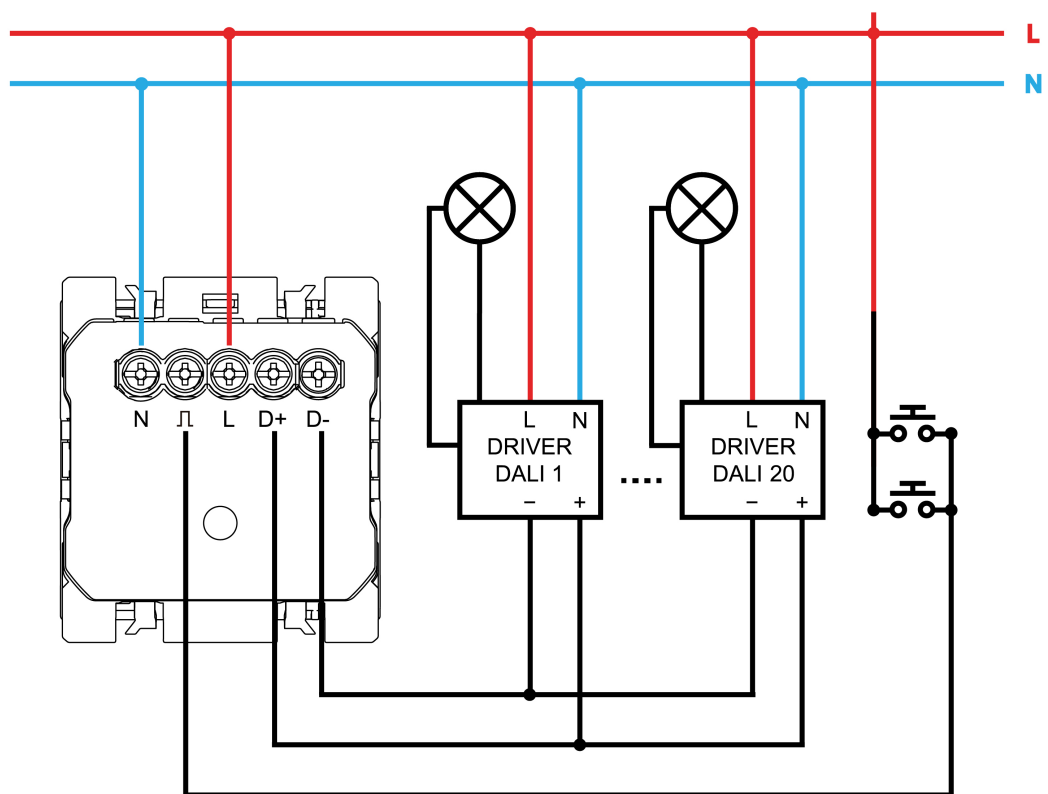

Para información más detallada consultar la hoja de instrucciones
 For more detailed information check the instruction sheet