

R/TV+SAT signal socket outlet intermediate titanium Simon 270

REF. 20000487-096



BASIC INFORMATION

FINISH

Matt titanium

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC000439

MATERIAL

Thermoplastic

PACKAGING CONTENTS

R-TV+SAT socket, cover and instruction sheet

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CONNECTOR TYPE

IEC

TYPE OF COVER

Large

NUMBER OF POSSIBLE ELEMENTS

1 element

FORMAT

R/TV,SAT

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Insertion

OPERATING TEMPERATURE RANGE (°C)

5 - 45 °C

RAL

9007

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

8

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Suitable for flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50083-2:2012 A1:2015 + EN 50581:2012

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053266212

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.088

PRODUCT NET WEIGHT

0.088

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053264935

UNITS CONTAINED PACKAGING

5

PACKAGING HEIGHT

55.5

PACKAGING WIDTH

58

PACKAGING LENGTH

280

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

901320

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT


0.44

● INTERMEDIA
20000487-09


○ FINAL
20000488-09x

● UNICA
20000486-09x


En Serie/Cascada

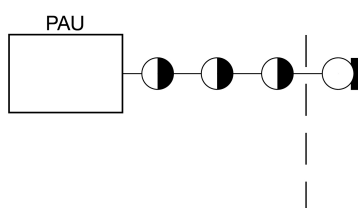


En Estrella




1

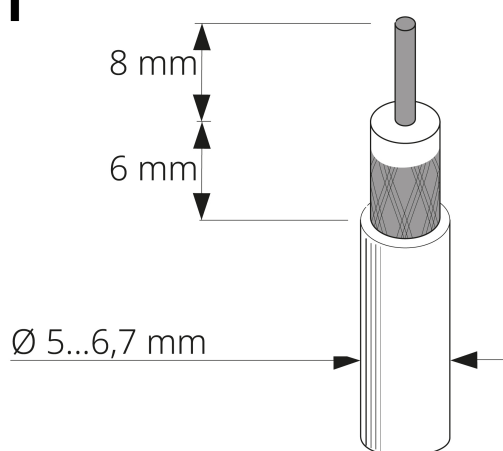


2

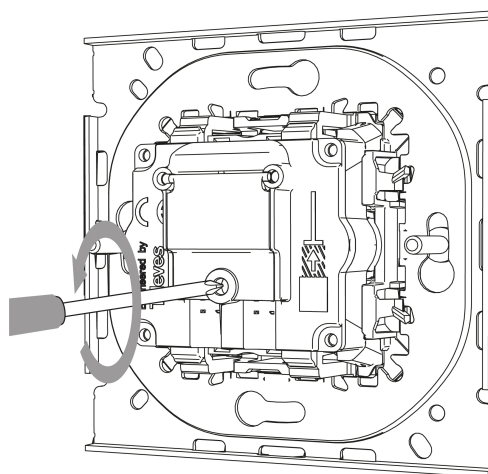

3

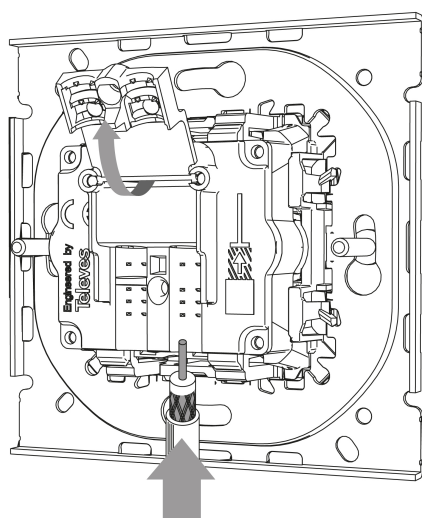

4

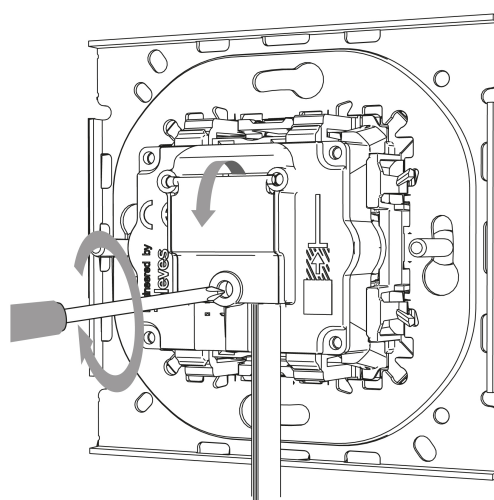

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet