

Single-pole switch 10AX 250V~ for half element with built-in pilot light and fast terminal connection system white
Simon 27 Play

REF. 27102-64



BASIC INFORMATION

DESCRIPTION

This control mechanism is part of the Simon 27 Play series is a single-pole switch half element of up to 10 AX of intensity and 250 volts. The switch has a built-in pilot light. The switch has dimensions 22.5 x 45 millimetres and is installed in a very simple way, allowing you to do so by recessed or surface-mounted. It is suitable for a wire section from 1.5 to 2.5 millimetres and stands out for its type of quick terminal connection. Its beautiful white in colour finish makes it incorporate into everyday perfectly to level decorative in almost any room of the home, premises or office is placed. For this purpose, it is recommended to use with parts, mechanisms and frames are compatible and the same white colour. If you want to replace the indicator light can be done combined with the reference 2700802-037 Simon product. Simon seeks always to create products that are easy to handle in your day to day. In this sense, this rocker switch is very user-friendly. Its manufacturing materials are very resistant and allow the product to withstand temperatures very low temperatures of -25 degrees, up to very high 50 degrees. Metal components with halogen-free thermoplastic insulation and thermoset trim, make it possible.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

REMARKS

Can be combined with article 2700802-037 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 AX	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP20	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
CONSUMPTION INDICATOR (MA) 0.55 mA	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	VERSION Single
NUMBER OF POSSIBLE ELEMENTS Half element	TYPE OF MECHANISM Pivoting	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION Yes		

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal, American, Small spaces and Centralisations	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLATION DIRECTION Horizontal, Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053251478

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

1229865

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.025

PRODUCT NET WEIGHT

0.025

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053035924

UNITS CONTAINED PACKAGING

20

PACKAGING HEIGHT

53

PACKAGING WIDTH

105

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1229865

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.5

PACKAGING NET WEIGHT


0.5

PACKAGING WEIGHT UNIT


KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

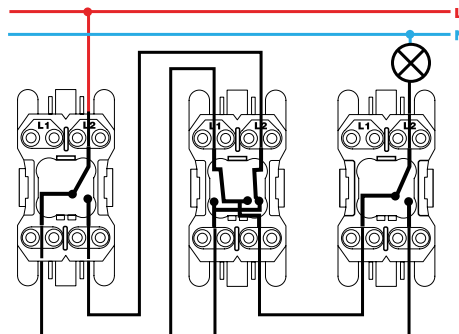


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch
XX00102-XX




Interrupor bipolar / Double pole switch
XX00134-XX

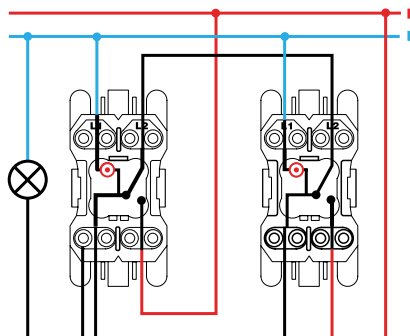


Conmutador / 2-way switch
XX00202-XX




Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

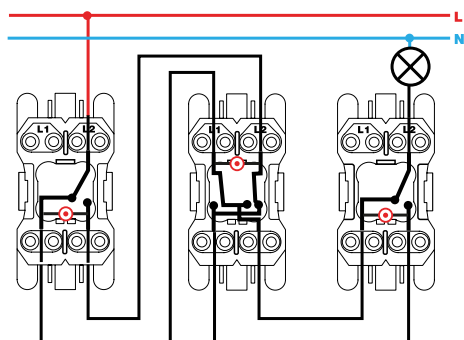

Conmutador cruce / Intermediate switch
XX2700254-XX