


R/TV+SAT signal socket outlet end matt black Simon 270

REF. 20000488-098

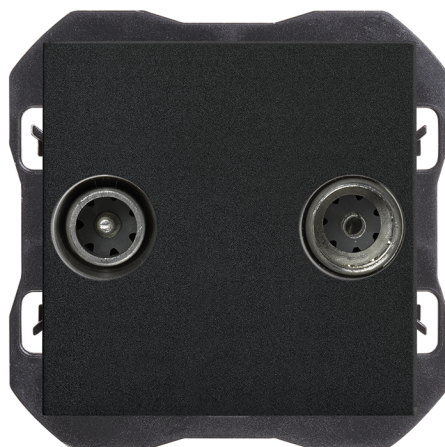

BASIC INFORMATION

FINISH

Matt black

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC000439

MATERIAL

Thermoplastic

PACKAGING CONTENTS

R-TV+SAT socket, cover and instruction sheet

TECHNICAL INFORMATION

AVAILABLE MARKET CE	FORMAT R/TV,SAT	TYPE OF MECHANISM Insertion
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP20	OPERATING TEMPERATURE RANGE (°C) 5 - 45 °C
CONNECTOR TYPE IEC	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	RAL 9005
NUMBER OF POSSIBLE ELEMENTS 1 element		STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 8	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for flush mounting
	INSTALLATION DIRECTION Horizontal, Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Screw

REGULATIONS

REGULATIONS

Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 50083-2:2012 + A1:2015 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053266311

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.088

PRODUCT NET WEIGHT

0.088

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053265031

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

55.5

PACKAGING WIDTH

117

PACKAGING LENGTH

280

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1818180

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.88

PACKAGING WEIGHT UNIT


KGM

● INTERMEDIA
20000487-09


○ FINAL
20000488-09x

● UNICA
20000486-09x


En Serie/Cascada

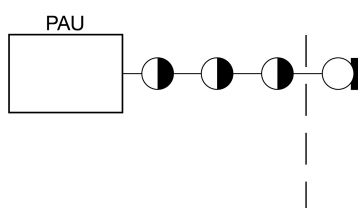


En Estrella




1

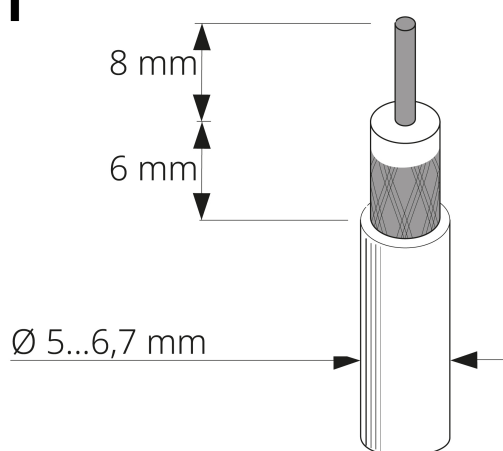


2

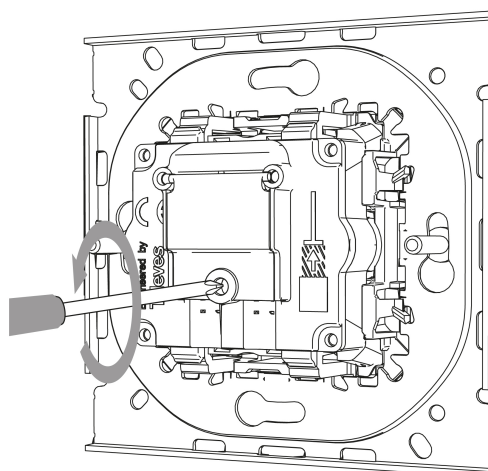

3

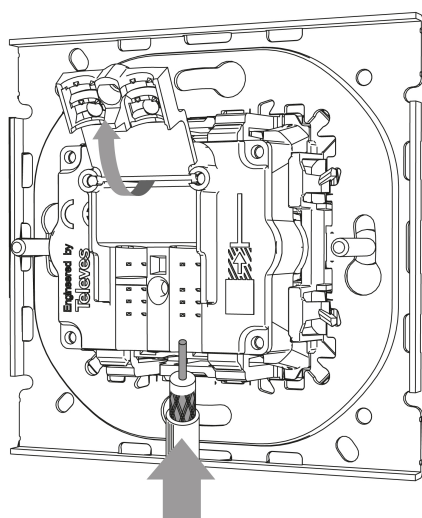

4

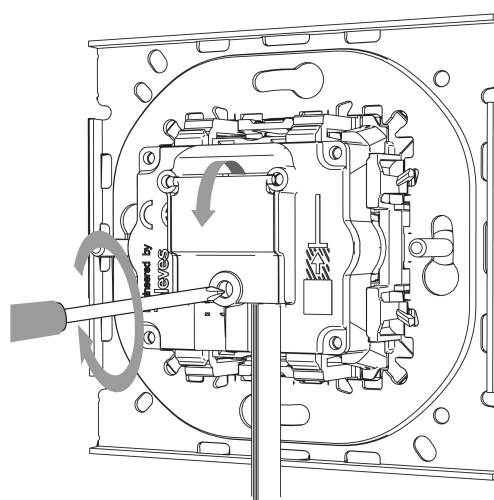

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet