

R/TV+SAT signal socket outlet intermediate champagne Simon 270

REF. 20000487-094



BASIC INFORMATION

FINISH

Matt champagne

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC000439

MATERIAL

Thermoplastic

PACKAGING CONTENTS

R-TV+SAT socket, cover and
instruction sheet

TECHNICAL INFORMATION

AVAILABLE MARKET CE	FORMAT R/TV,SAT	TYPE OF MECHANISM Insertion
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP20	OPERATING TEMPERATURE RANGE (°C) 5 - 45 °C
CONNECTOR TYPE IEC	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	RAL 7048
NUMBER OF POSSIBLE ELEMENTS 1 element		STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 8	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for flush mounting
	INSTALLATION DIRECTION Horizontal, Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Screw

REGULATIONS

REGULATIONS

Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 50083-2:2012 + A1:2015 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053266199

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.088

PRODUCT NET WEIGHT

0.088

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053264911

UNITS CONTAINED PACKAGING

5

PACKAGING HEIGHT

55.5

PACKAGING WIDTH

58

PACKAGING LENGTH

280

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

901320

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.44

PACKAGING WEIGHT UNIT


KGM

● INTERMEDIA
20000487-09


○ FINAL
20000488-09x

● UNICA
20000486-09x


En Serie/Cascada

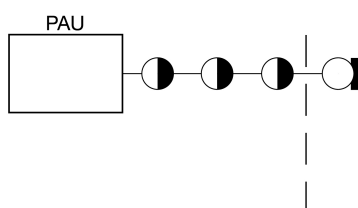


En Estrella




1

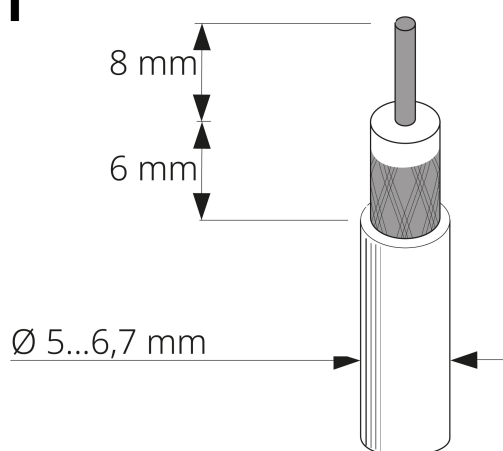


2

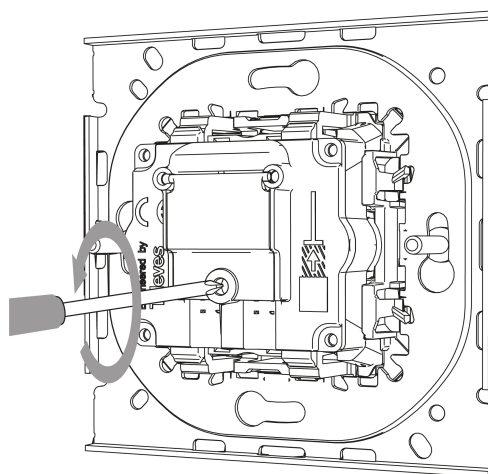

3

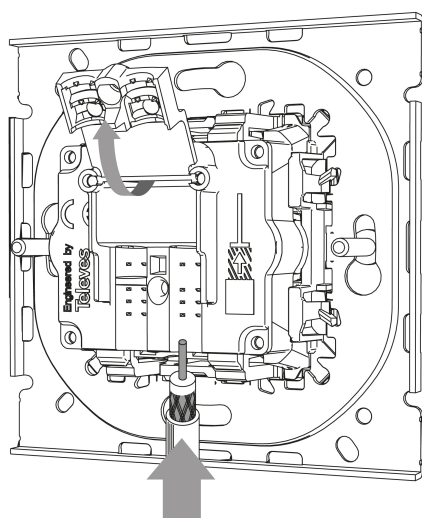

4

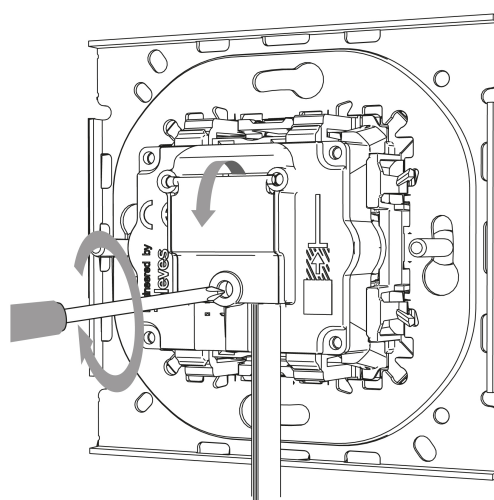

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet