


Simon iO electronic dimmer switch LED strip (PWM) with slender rocker gold Simon 270

REF. 21001314-095

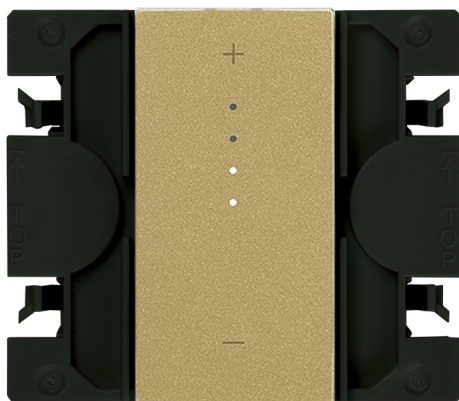

BASIC INFORMATION

FINISH

Matt gold

SYMBOL

"+/-"

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 270 frames

PACKAGING CONTENTS

Dimmer switch and instruction sheet

ETIM CLASS

EC000025

REMARKS

All you need to do is add the power supply, with no need for other external elements (pads, push buttons switches, controllers, etc.).

TECHNICAL INFORMATION

AVAILABLE MARKET CE	LATCH TYPE Electric	POWER SUPPLY (V~) 12-24 Vdc
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	RAL 1036
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
INDICATOR FUNCTION Yes	OPERATING TEMPERATURE RANGE (°C) 0 - 40 °C	VOLTAGE (V~) 12/24 Vdc
IP RATING IP20		

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 7	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for flush mounting
	INSTALLATION DIRECTION Horizontal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Screw

REGULATIONS

REGULATIONS

Dir. 2011/65/UE RoHS + post. mod. | Dir. 2014/53/UE RED | EN 50428:2005 | EN 50428:2005 A1:2007 | EN 50428:2005 A2:2009 | EN IEC 63000:2018 | ETSI EN 300328 V2.2.2

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053277690

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.082

PRODUCT NET WEIGHT

0.071

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053277690

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

80

PACKAGING WIDTH

55.5

PACKAGING LENGTH

55.5

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

242000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT


0.082

PACKAGING NET WEIGHT

0.071

PACKAGING WEIGHT UNIT

KGM

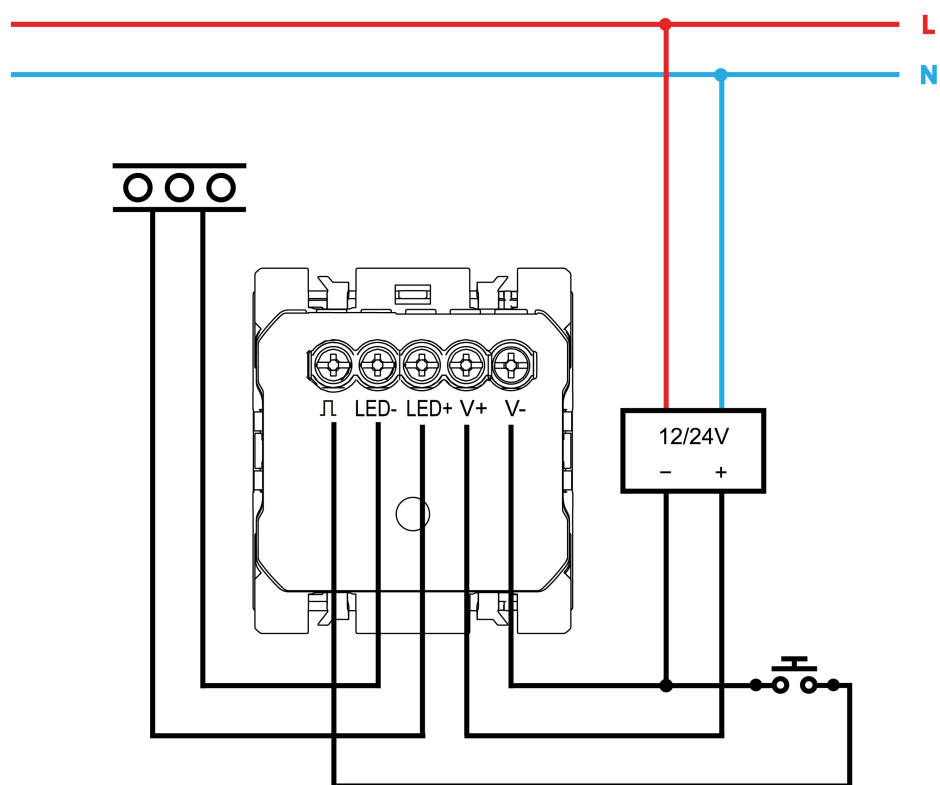

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet