



Equal Female Elbow

Equal Female Elbow


Features:

- Solid Piece Elbow
- Compact Full Flow
- High Working Pressure
- Mild Steel - High Grade Material
- Sealing face and threads machines to high tolerance
- High Level Corrosion Resistance Plating (CR3 compliant)
- Available in Stainless Steel 316 or Cupro Nickel



Benefits:

- Reliable
- Highly resistant to leakage even under severe vibration, pressure pulsation and temperature
- No Brazed parts

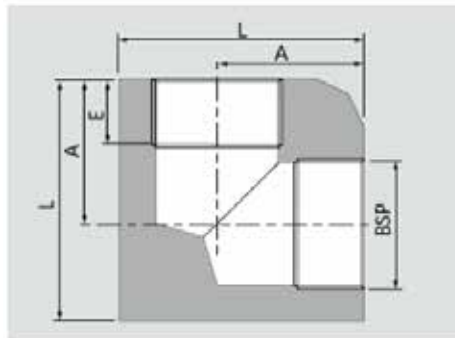

| BSP | Part No | L1 mm | L2 mm | E mm | A mm | Body A/F mm | Max WP Bar |
|-------|---------|-------|-------|------|------|-------------|------------|
| 1/8 | KREFT2 | 35 | 17 | 10 | 27 | 19 | 680 |
| 1/4 | KREFT4 | 41 | 21 | 11 | 33 | 25 | 680 |
| 3/8 | KREFT6 | 48 | 24 | 13 | 37 | 25 | 680 |
| 1/2 | KREFT8 | 57 | 29 | 16 | 44 | 32 | 680 |
| 3/4 | KREFT12 | 70 | 35 | 19 | 56 | 41 | 680 |
| 1 | KREFT16 | 83 | 41 | 21 | 67 | 51 | 500 |
| 1-1/4 | KREFT20 | 89 | 44 | 21 | 73 | 64 | 500 |
| 1-1/2 | KREFT24 | 105 | 52 | 25 | 83 | 64 | 500 |
| 2 | KREFT32 | 127 | 64 | 30 | 102 | 76 | 500 |