



60-6018 - (9000)

BSPT Male x BSPT Male



BRENNAN INDUSTRIES, EXTRAORDINARY FITTINGS

In business for over 60 years, Brennan supplies more than 50,000 types of hydraulic fittings and adaptors in sizes ranging from 1/16 to 3 inches.

Learn More at Brennan University:


[Fittings 101](#)

[Tube Fittings Resources](#)

[Literature and Certifications](#)

Tech Data Sheet: 71445

60-6018 - (9000)

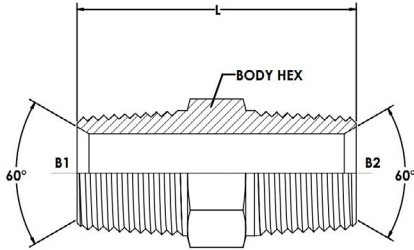

DESCRIPTION:
BSPT Male x BSPT Male

UK SERIES:
60-6018

US SERIES:
9000

THREAD TYPE B1:
MALE BSPT (R)

THREAD SPECIFICATION B1:
ISO 7-1

THREAD TYPE B2:
MALE BSPT (R)

THREAD SPECIFICATION B2:
ISO 7-1

BODY MATERIAL:
STEEL

| Item | THREAD SIZE B1 | THREAD DRILL B1 (MM) | THREAD SIZE B2 | THREAD DRILL B2 (MM) |
|---------------|----------------|----------------------|----------------|----------------------|
| 60-6018-02-02 | 1/8-28 | 4.8 | 1/8-28 | 4.8 |
| 60-6018-04-02 | 1/4-19 | 6.0 | 1/8-28 | 4.5 |
| 60-6018-04-04 | 1/4-19 | 7.1 | 1/4-19 | 7.1 |
| 60-6018-06-02 | 3/8-19 | 9.5 | 1/8-28 | 4.8 |
| 60-6018-06-04 | 3/8-19 | 9.0 | 1/4-19 | 6.0 |
| 60-6018-06-06 | 3/8-19 | 9.0 | 3/8-19 | 9.0 |
| 60-6018-08-04 | 1/2-14 | 12.0 | 1/4-19 | 6.0 |
| 60-6018-08-06 | 1/2-14 | 12.0 | 3/8-19 | 9.0 |
| 60-6018-08-08 | 1/2-14 | 13.5 | 1/2-14 | 13.5 |
| 60-6018-10-10 | 5/8-14 | 15.0 | 5/8-14 | 15.0 |
| 60-6018-12-04 | 3/4-14 | | 1/4-19 | |
| 60-6018-12-06 | 3/4-14 | | 3/8-19 | |
| 60-6018-12-08 | 3/4-14 | 16.0 | 1/2-14 | 11.0 |
| 60-6018-12-12 | 3/4-14 | 17.0 | 3/4-14 | 17.0 |
| 60-6018-08-16 | 1-11 | | 1/2-14 | |
| 60-6018-16-12 | 1-11 | 23.8 | 3/4-14 | 18.2 |
| 60-6018-16-16 | 1-11 | 23.8 | 1-11 | 23.8 |
| 60-6018-12-20 | 1-1/4-11 | | 3/4-14 | |
| 60-6018-16-20 | 1-1/4-11 | | 1-11 | |
| 60-6018-20-20 | 1-1/4-11 | 31.8 | 1-1/4-11 | 31.8 |
| 60-6018-24-12 | 1-1/2-11 | | 3/4-14 | |
| 60-6018-24-16 | 1-1/2-11 | | 1-11 | |
| 60-6018-24-20 | 1-1/2-11 | | 1-1/4-11 | |
| 60-6018-24-24 | 1-1/2-11 | 33.3 | 1-1/2-11 | 33.3 |
| 60-6018-20-32 | 2-11 | | 1-1/4-11 | |
| 60-6018-24-32 | 2-11 | | 1-1/2-11 | |
| 60-6018-32-32 | 2-11 | 49.2 | 2-11 | 49.2 |
| 60-6018-32-40 | 2-1/2-11 | | 2-11 | |
| 60-6018-40-40 | 2-1/2-11 | | 2-1/2-11 | |
| 60-6018-48-48 | 3-11 | | 3-11 | |