




Strong Tee Hinge

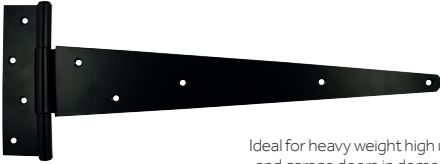

Ideal for heavy weight high use gates, sheds and garage doors in domestic applications.

Technical Data						
Band Length (mm)	250	300	350	400	450	600
Band Thickness (mm)	2.3	2.3	2.3	2.8	2.8	2.8
Knuckle Ø (mm)	12.0	12.0	12.0	14.0	14.0	14.0
Leaf Size L x W (mm)	100 x 20	115 x 30	127 x 30	140 x 30	150 x 30	166 x 40
No. of Screw Holes (Pair)	14	18	18	18	18	20
Screw Ø (mm)	4.0	4.0	4.0	4.0	5.0	5.0

Doors/gates over 7ft height, should be fitted with a third hinge to prevent warping.

Product Code		Band Length (mm)	Band Length (inch)	To Suit Gate Width (mm)	Pack Qty (pcs)	Carton Qty (packs)
Epoxy Black	Hot Dipped Galvanised					
BAG						
STH10BB	STH10GB	250	10	500 - 750	1 Pair	40 Pairs
STH12BB	STH12GB	300	12	600 - 900	1 Pair	30 Pairs
STH14BB	STH14GB	350	14	700 - 1050	1 Pair	20 Pairs
STH16BB	STH16GB	400	16	800 - 1200	1 Pair	20 Pairs
STH18BB	STH18GB	450	18	900 - 1350	1 Pair	20 Pairs
STH24BB	STH24GB	600	24	1200 - 1800	1 Pair	10 Pairs
HGB03						

HGB03

TIMBAG - FIXINGS INCLUDED						
STH10B	STH10G	250	10	500 - 750	1 Pair	6 Pairs
STH12B	STH12G	300	12	600 - 900	1 Pair	6 Pairs
STH14B	STH14G	350	14	700 - 1050	1 Pair	6 Pairs
STH16B	STH16G	400	16	800 - 1200	1 Pair	8 Pairs
STH18B	STH18G	450	18	900 - 1350	1 Pair	6 Pairs
STH24B	STH24G	600	24	1200 - 1800	1 Pair	4 Pairs

HGP03

Scotch Tee Hinge



Ideal for heavy weight high use gates and shed doors in domestic, commercial and agricultural applications.

Technical Data										
Band Length (mm)	100	150	200	250	300	355	400	450	500	600
Thickness (mm)	2.2	2.2	2.2	2.2	2.8	3.0	3.0	3.0	3.0	3.0
Knuckle Ø (mm)	11	12	12	12	12	16	16	16	16	16
Leaf Size L (mm)	90	90	100	100	145	145	175	175	175	175
Leaf Size W (mm)	30	30	30	30	40	40	55	55	55	55
No. of Screw Holes (Pair)	12	12	12	12	12	16	16	16	16	16
Screw Ø (mm)	4.0	4.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0

Doors/gates over 7ft height, should be fitted with a third hinge to prevent warping.

Product Code	Band Length (mm)	Band Length (inch)	To Suit Gate Width (mm)	Pack Qty (pcs)	Carton Qty (packs)
Hot Dipped Galvanised					
BAG					
442270	100	4	200 - 300	1 Pair	50 Pairs
442159	150	6	300 - 450	1 Pair	50 Pairs
442241	200	8	400 - 600	1 Pair	40 Pairs
442657	250	10	500 - 750	1 Pair	30 Pairs
442225	300	12	600 - 900	1 Pair	25 Pairs
442678	350	14	700 - 1050	1 Pair	10 Pairs
442336	400	16	800 - 1200	1 Pair	10 Pairs
442784	450	18	900 - 1350	1 Pair	10 Pairs
442114	500	20	1000 - 1500	1 Pair	8 Pairs
442878	600	24	1200 - 1800	1 Pair	8 Pairs

HGB04

TIMBAG - FIXINGS INCLUDED					
447558	100	4	200 - 300	1 Pair	10 Pairs
447254	150	6	300 - 450	1 Pair	10 Pairs
447232	200	8	400 - 600	1 Pair	10 Pairs
447778	250	10	500 - 750	1 Pair	10 Pairs
447669	300	12	600 - 900	1 Pair	10 Pairs
447552	350	14	700 - 1050	1 Pair	8 Pairs
447154	400	16	800 - 1200	1 Pair	8 Pairs
447785	450	18	900 - 1350	1 Pair	4 Pairs
447336	500	20	1000 - 1500	1 Pair	4 Pairs
447123	600	24	1200 - 1800	1 Pair	4 Pairs

HGP04

Medium Strap Hinge



Commonly used for bi-folding garage and shed doors in domestic applications.

Doors/gates over 7ft height, should be fitted with a third hinge to prevent warping.



Technical Data		
Band Length (mm)	150	200
Thickness (mm)	2.0	2.0
Overall Length (mm)	300	400
Knuckle Ø (mm)	10.0	10.0
To Suit Gate Width (mm)	300 - 450	400 - 600
No. of Screw Holes (Pair)	12	16
Screw Ø (mm)	4.0	4.0

Product Code	Band Length (mm)	Band Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
Zinc				
BAG				
SH6ZB	150	6	1 Pair	60 Pairs
SH8ZB	200	8	1 Pair	60 Pairs

HGB05