

## Suction cup BL30-4 Silicone

Article number: 0116971



- Long and flexible bellow
- Long and thin lip
- High flow fitting
- Working area = lip diameter
- Wide temperature range (-40°C to +200°C)

### Technical data

Description	Unit	Value
Suction cup shape	-	Multibellows
Application	-	Bag handling
Suction cup design	-	Round
Characteristics	-	Bag handling
Material	-	Silicone (SIL)
Weight, min.	g	5
Suction cup model	-	BL-4
Volume	cm <sup>3</sup>	4.1
Height	mm	36.5
Outer diameter, min.	mm	30.5
Fitting size	-	None
Fitting option	-	None
Fitting style	-	None
Fitting type	-	None
Suction cup model	-	BL30-4
Movement, vertical max.	mm	19
Curve radius, min.	mm	20

### Performance - Lifting forces


BL30-4	Vertical (N)	Parallel (N)
20 -kPa	8	4.2

Material	
Name	Silicone, SIL 40° Shore A
Colour	Red
Temperature, min.   °C	-40
Temperature max.   °C	200
Hardness   °Shore A	40

### Material resistance

Alcohol	Good
Concentrated acids	Poor
Ethanol	n/a
Hydrolysis	Fair
Methanol	n/a
Oil	Poor
Oxidation	Excellent
Petrol	Poor
Wear resistance	Good
Weather and ozone	Excellent

### Dimensional drawings

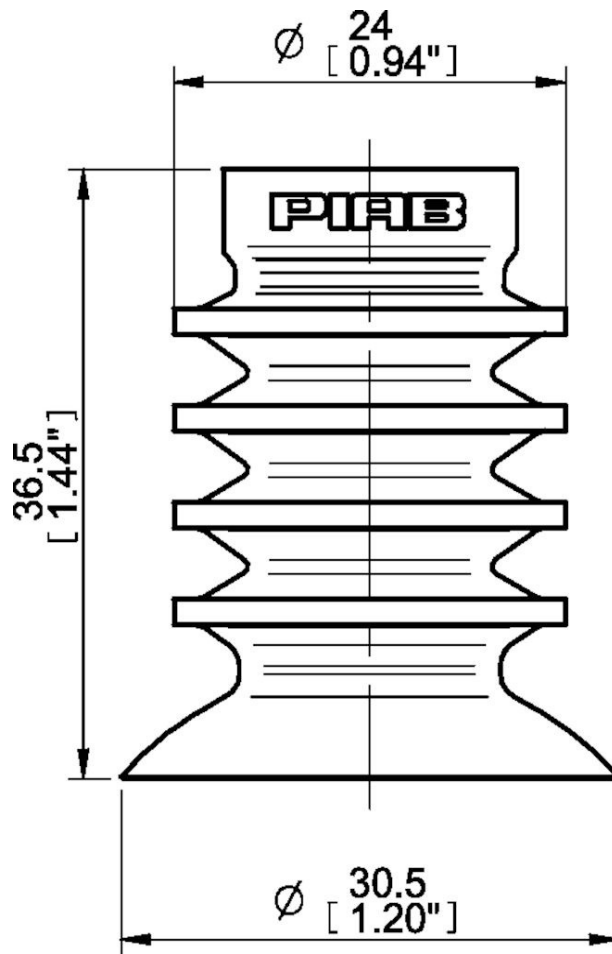

### Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

### Accessories

0118793 | Fitting G1/4" male, bag  
 0118794 | Fitting 1/4" NPT male, bag