


Fitting



The SK15 Skip Lock is designed to fit skip lugs as dimensioned above.

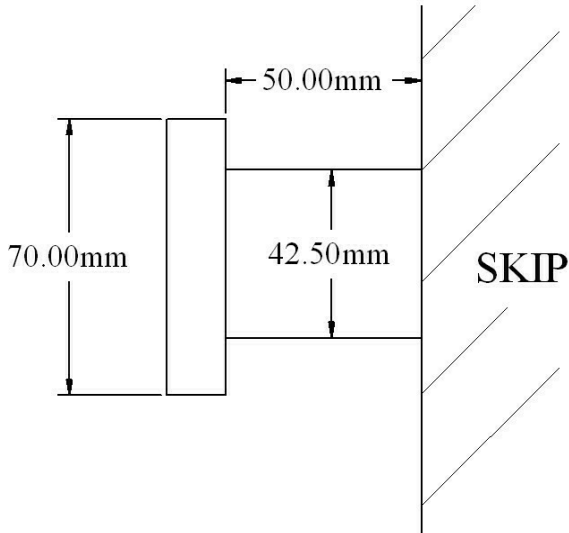

1. Place the cover over the lifting point of the skip.



2. With the lock bolt in the unlocked position, insert it through the cover and lock it into the end cup by turning the key a quarter turn clockwise. Remove the key.



3. To unlock, insert the key turn it a quarter turn anti clockwise and withdraw the lock from the cover.

We have taken every care in the design and manufacture of this security device and we believe that it is an effective deterrent. However we cannot guarantee that it will resist the efforts of the most determined thief, and as such we do not accept any liability for loss or damage caused by theft, vandalism or other illegal activity against property to which this device is fitted.

Bulldog Security Products

Units 1 - 4 Stretton Road, Much Wenlock, Shropshire,
TF13 6DH.

Tel: 01952 728171 Fax: 01952 728117

Lock Lubrication.

IMPORTANT - To ensure free movement of the lock, spray lock mechanism & ball bearings with WD40 (or equivalent) minimum every four months.