



# 37-4100 - (7000)

BSPT Male x JIC Male 37 Deg Cone



## **BRENNAN INDUSTRIES, EXTRAORDINARY FITTINGS**

In business for over 60 years, Brennan supplies more than 50,000 types of hydraulic fittings and adaptors in sizes ranging from 1/16 to 3 inches.

### **Learn More at Brennan University:**

[Fittings 101](#)

[Tube Fittings Resources](#)

[Literature and Certifications](#)

**Tech Data Sheet: 71379**

# 37-4100 - (7000)



**DESCRIPTION:**

BSPT Male x JIC Male 37 Deg Cone

**UK SERIES:**

37-4100

**US SERIES:**

7000

**THREAD TYPE B1:**

MALE JIC SAE 37 DEGREE FLARE

**THREAD SPECIFICATION B1:**

SAE J514

**THREAD TYPE B2:**


MALE BSPT (R)

**THREAD SPECIFICATION B2:**

ISO 7-1

**BODY MATERIAL:**

STEEL

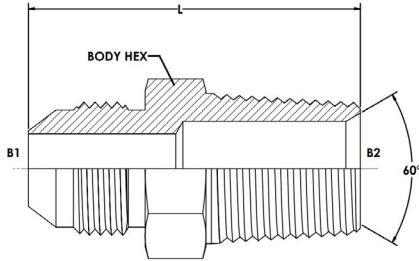

Item	THREAD SIZE B1	THREAD DRILL B1 (MM)	THREAD SIZE B2	THREAD DRILL B2 (MM)
37-4100-04-02	7/16-20	3.8	1/8-28	3.8
37-4100-04-04	7/16-20	4.4	1/4-19	7.0
37-4100-04-06	7/16-20	4.4	3/8-19	10.3
37-4100-05-02	1/2-20	6.0	1/8-28	4.4
37-4100-05-04	1/2-20	6.0	1/4-19	6.0
37-4100-05-06	1/2-20	6.0	3/8-19	10.3
37-4100-06-02	9/16-18	7.5	1/8-28	4.8
37-4100-06-04	9/16-18	7.5	1/4-19	7.0
37-4100-06-06	9/16-18	7.0	3/8-19	9.0
37-4100-06-08	9/16-18	7.0	1/2-14	12.0
37-4100-06-12	9/16-18	7.0	3/4-14	18.3
37-4100-08-04	3/4-16	9.9	1/4-19	7.0
37-4100-08-06	3/4-16	9.9	3/8-19	10.3
37-4100-08-08	3/4-16	9.9	1/2-14	13.5
37-4100-08-12	3/4-16	9.9	3/4-14	18.3
37-4100-08-16	3/4-16	9.9	1-11	
37-4100-10-04	7/8-14		1/4-19	
37-4100-10-06	7/8-14	12.3	3/8-19	10.3
37-4100-10-08	7/8-14	12.3	1/2-14	12.3
37-4100-10-12	7/8-14	12.3	3/4-14	17.5
37-4100-10-16	7/8-14	12.3	1-11	23.8
37-4100-12-08	1-1/16-12	15.5	1/2-14	13.5
37-4100-12-12	1-1/16-12	15.5	3/4-14	18.3
37-4100-12-16	1-1/16-12	15.5	1-11	22.0
37-4100-14-12	1-3/16-12	18.3	3/4-14	18.3
37-4100-16-08	1-5/16-12		1/2-14	
37-4100-16-12	1-5/16-12	21.5	3/4-14	18.3
37-4100-16-16	1-5/16-12	21.4	1-11	23.8
37-4100-16-20	1-5/16-12	21.4	1-1/4-11	31.8
37-4100-20-16	1-5/8-12	27.5	1-11	23.8
37-4100-20-20	1-5/8-12	27.4	1-1/4-11	29.0
37-4100-20-24	1-5/8-12	27.4	1-1/2-11	33.3
37-4100-24-16	1-7/8-12		1-11	
37-4100-24-20	1-7/8-12	33.3	1-1/4-11	29.0
37-4100-24-24	1-7/8-12	33.3	1-1/2-11	33.3
37-4100-24-32	1-7/8-12	33.3	2-11	45.0
37-4100-32-32	2-1/2-12	45.0	2-11	45.0