




50-5405 - (5405)

NPT Male x NPT Female Extended

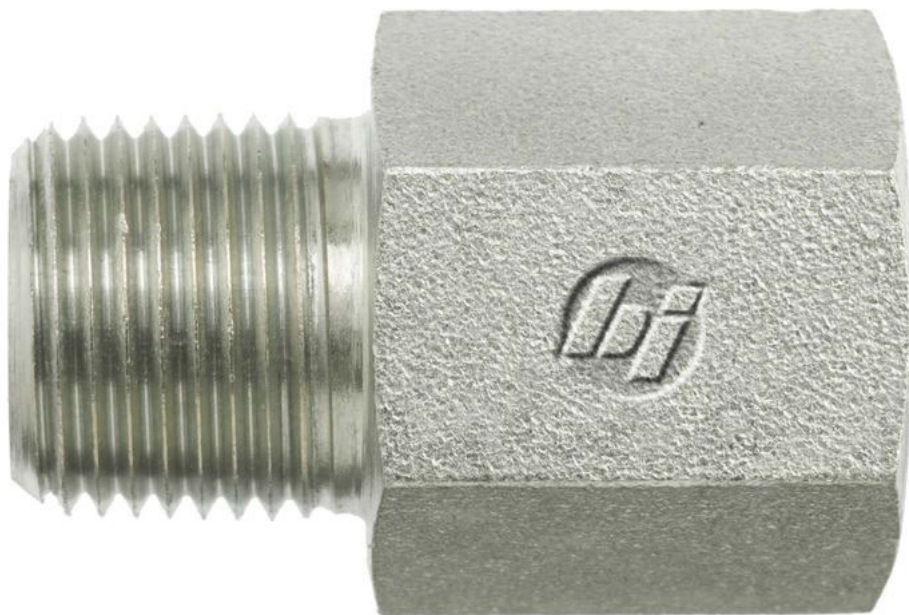

BRENNAN INDUSTRIES, EXTRAORDINARY FITTINGS

In business for over 60 years, Brennan supplies more than 50,000 types of hydraulic fittings and adaptors in sizes ranging from 1/16 to 3 inches.



Learn More at Brennan University:

[Fittings 101](#)

[Tube Fittings Resources](#)

[Literature and Certifications](#)

Tech Data Sheet: 71462

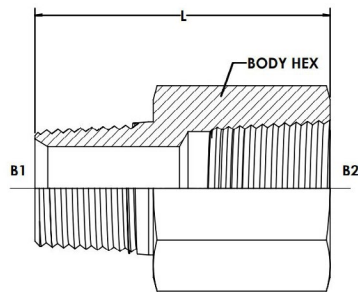

50-5405 - (5405)

DESCRIPTION:

NPT MALE X NPT FEMALE EXTENDED

UK PART NUMBER:

50-5405

US PART NUMBER:

5405

Item	A1 NPTF	A2 NPTF	A1 DRILL	L LGTH	C HEX	Material
50-5405-01-02	1/16-27	1/8-27	0.117	1.04	0.625	STEEL
50-5405-02-02	1/8-27	1/8-27	0.188	1.040	0.625	STEEL
50-5405-02-04	1/8-27	1/4-18	0.188	1.210	0.750	STEEL
50-5405-02-06	1/8-27	3/8-18	0.188	1.260	0.875	STEEL
50-5405-02-08	1/8-27	1/2-14	0.188	1.500	1.125	STEEL
50-5405-04-02	1/4-18	1/8-27	0.281	1.220	0.625	STEEL
50-5405-04-04	1/4-18	1/4-18	0.281	1.390	0.750	STEEL
50-5405-04-06	1/4-18	3/8-18	0.281	1.440	0.875	STEEL
50-5405-04-08	1/4-18	1/2-14	0.281	1.68	1.125	STEEL
50-5405-04-12	1/4-18	3/4-14	0.281	1.74	1.375	STEEL
50-5405-06-02	3/8-18	1/8-27	0.406	1.430	0.750	STEEL
50-5405-06-04	3/8-18	1/4-18	0.406	1.440	0.750	STEEL
50-5405-06-06	3/8-18	3/8-18	0.406	1.44	0.875	STEEL
50-5405-06-08	3/8-18	1/2-14	0.406	1.68	1.125	STEEL
50-5405-06-12	3/8-18	3/4-14	0.406	1.74	1.375	STEEL
50-5405-06-16	3/8-18	1 11-1/2	0.406	2.100	1.625	STEEL
50-5405-08-04	1/2-14	1/4-18	0.531	1.640	0.875	STEEL
50-5405-08-06	1/2-14	3/8-18	0.531	1.660	0.875	STEEL
50-5405-08-08	1/2-14	1/2-14	0.531	1.87	1.125	STEEL
50-5405-08-12	1/2-14	3/4-14	0.531	1.93	1.375	STEEL
50-5405-08-16	1/2-14	1-11-1/2	0.531	2.18	1.625	STEEL
50-5405-12-04	3/4-14	1/4-18	0.719	1.600	1.125	STEEL
50-5405-12-06	3/4-14	3/8-18	0.571	1.66	1.125	STEEL
50-5405-12-08	3/4-14	1/2-14	0.719	1.930	1.125	STEEL
50-5405-12-12	3/4-14	3/4-14	0.719	1.93	1.375	STEEL
50-5405-12-16	3/4-14	1-11-1/2	0.719	2.180	1.625	STEEL
50-5405-12-20	3/4-14	1-1/4-11-1/2	0.719	2.270	2.000	STEEL
50-5405-16-08	1-11-1/2	1/2-14	0.697	2.080	1.375	STEEL
50-5405-16-12	1-11-1/2	3/4-14	0.938	2.120	1.375	STEEL
50-5405-16-16	1-11-1/2	1-11-1/2	0.938	2.370	1.625	STEEL
50-5405-16-20	1-11-1/2	1-1/4-11-1/2	0.938	2.46	2.000	STEEL
50-5405-16-24	1-11-1/2	1-1/2-11-1/2	0.938	2.460	2.375	STEEL
50-5405-20-16	1-1/4-11-1/2	1-11-1/2	1.250	2.420	1.750	STEEL
50-5405-20-20	1-1/4-11-1/2	1-1/4-11-1/2	1.250	2.49	2.000	STEEL
50-5405-20-24	1-1/4-11-1/2	1-1/2-11-1/2	1.250	2.500	2.375	STEEL
50-5405-20-32	1-1/4-11-1/2	2-11-1/2	1.250	2.600	2.875	STEEL
50-5405-24-20	1-1/2-11-1/2	1-1/4-11-1/2	1.500	2.540	2.000	STEEL
50-5405-24-24	1-1/2-11-1/2	1-1/2-11-1/2	1.500	2.530	2.375	STEEL
50-5405-24-32	1-1/2-11-1/2	2-11-1/2	1.500	2.630	2.875	STEEL
50-5405-32-32	2-11-1/2	2-11-1/2	1.938	2.660	2.875	STEEL