Flat voice and data plate with dust cover for 1 element with 1 RJ45 category 6 UTP graphite Simon 500 Cima

REF. **50002085-038**



BASIC INFORMATION

DESCRIPTION

It is plate is designed for voice and data connections of an element and for 1 and 2 RJ45 connectors and is category 6UTP. Includes both the adapter module and RJ45 connectors. It also has dust shutter and supports a cable section of 22-24 AWG. It is one of the many mechanisms of the Simon 500 Cima series. A series focused on create points of work expandable and configurable, integrating the maximum of elements in a minimal space. Also include kits now ready to install. Therefore, any space can be turned into a work point, quick, efficient. Did you know, in addition to the products of the collection Simon 500 Cima are manufactured with the raw materials of the highest quality and halogen-free, avoiding the flame spread in case of fire and smoke? Because the security is not at odds with the design and functionality.

FINISH

Graphite

COMPATIBILITY

Simon 500 Cima enclosures

PACKAGING CONTENTS

Flat voice and data plate with dust cover, category 6 UTP RJ45 connector and installation manual

ETIM CLASS

EC000018

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
22-26 AWG wiring

RJ45 CONNECTION
With insertion tool

CONNECTOR CHARACTERISTICS
category 6 UTP

NUMBER OF CONNECTORS
1

RJ45 CONNECTORS
Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

DUST PROTECTION
Yes

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
1

PLATE TYPE
Flat

RAL
7021

RJ45 ADAPTOR MODULE
Included in voice and data plate

SNAP-FIT RJ45 PLATES
Keystone I, II, ATT®/Avaya®

SNAP-FIT TYPE
Keystone I, II, ATT®/Avaya®

VERSION
Single

INSTALLATION AND MAINTENANCE

REMOVAL OF CONNECTOR

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.027

PRODUCT NET WEIGHT

0.027

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053097991

UNITS CONTAINED PACKAGING

20

PACKAGING HEIGHT

80

PACKAGING WIDTH

224

PACKAGING LENGTH

290

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

0.052

PACKAGING VOLUME UNIT

HLT

PACKAGING GROSS WEIGHT

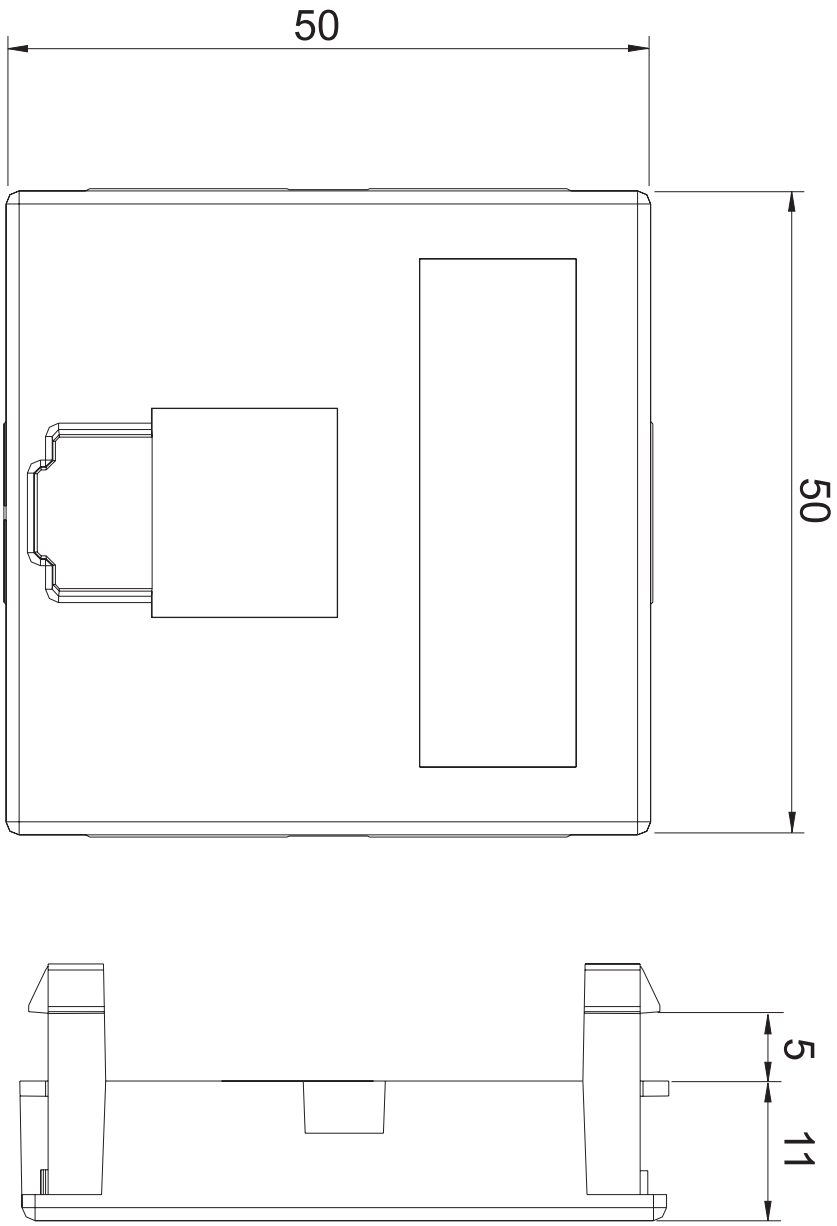
0

PACKAGING NET WEIGHT

0.54

PACKAGING WEIGHT UNIT

KGM


50
50
5
11