
USB-C charger 65W Simon 75

REF. **7500383-039**

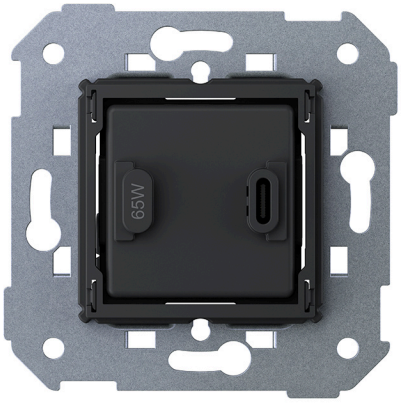

BASIC INFORMATION

DESCRIPTION

USB C Charger 65W Simon 75. The USB C port has a maximum power of 65W. It features Power Delivery technology for quick and efficient charging.

MATERIAL

FR4,Steel,Plastic

ETIM CLASS

EC002949

REMARKS

Suitable for electronic devices with a universal USB-C charger, mandatory in the EU under current legislation.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
1.5...2.5

FORMAT
USB

FREQUENCY
50 - 60 Hz

IP RATING
IP20

LINKABLE
Yes

MONOBLOCK
No

OPERATING TEMPERATURE RANGE (°C)
0...+35

POWER SUPPLY (V~)
127/230 V~

RECESS DIMENSION (MM)
40

STORAGE TEMPERATURE RANGE (°C)
-25...+50

USB CHARACTERISTICS
USB C = 5,0 VDC 3,0 A 15,0 W / 9,0 VDC 3,0 A 27,0 W / 12,0 VDC 3,0 A 36,0 W / 15,0 VDC 3,0 A 45,0 W / 20,0 VDC 3,25 A 65,0 W

USB CURRENT (A)
3.0 A

USB PORT TYPE
C

POWER DELIVERY USB
Yes

QUICK CHARGE USB
Yes

USB VOLTAGE (V~)
5/20 V~

VOLTAGE (V~)
127/230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
8

CLAW
Simon 27

REMOVAL OF COVER
Only with tool

INSTALLATION DIRECTION
Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053452486

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.15

PRODUCT NET WEIGHT
0.14

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053452486

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
57

PACKAGING WIDTH
76

PACKAGING LENGTH
76

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
329232

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.17

PACKAGING NET WEIGHT
0.14

PACKAGING WEIGHT UNIT
KGM

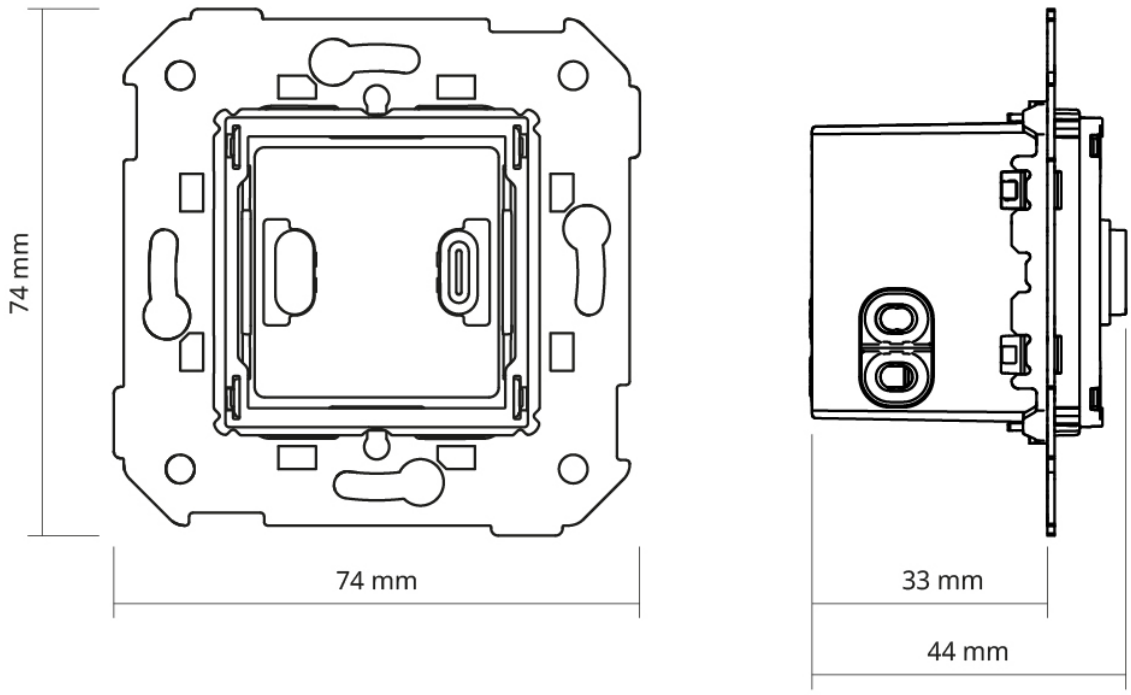
74 mm
74 mm
33 mm
44 mm