


Unipolar switch 10 AX 250V~ with quick terminal connection system Simon 75

REF. 75101-39

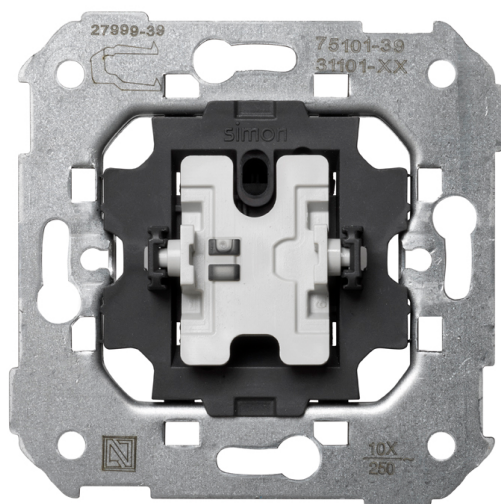

BASIC INFORMATION

DESCRIPTION

1 unipolar switch of 10 AX and 250V~ with quick terminal connection system and rocking operation, compatible and belonging to the Simon 75 brand. It offers the possibility of implementing a signaling function through a signaling support and key with viewer. For installation, it will be sufficient to press or place it on the surface, the accepted cable section is from 1.5 to 2.5 mm and it includes 11 mm of stripped cable. The material is made of metal components with halogen-free thermoplastic insulation, able to oscillate between 5 and 40°, and capable of withstanding a maximum temperature range of -25 to 50° C, this item fully complies with the UNE-EN 60669-1:2002 + A1:2003 + A2:2009 standard.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82
Detail, Simon 82 Nature, Simon
82 Concept and Simon 82

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Possibility of implementing signalling features with signal support and rocker with viewer.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 AX	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP21	RECESS DIMENSION (MM) 40
NUMBER OF CONTACTS 2	LINKABLE No	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Single
FREQUENCY 50 Hz	MONOBLOCK No	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	NOMINAL VOLTAGE (V~) 230 V~	NUMBER OF WIRES 2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 15	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255735

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.058

PRODUCT NET WEIGHT

0.058

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053003510

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.565

PACKAGING NET WEIGHT

0.58

PACKAGING WEIGHT UNIT

KGM

