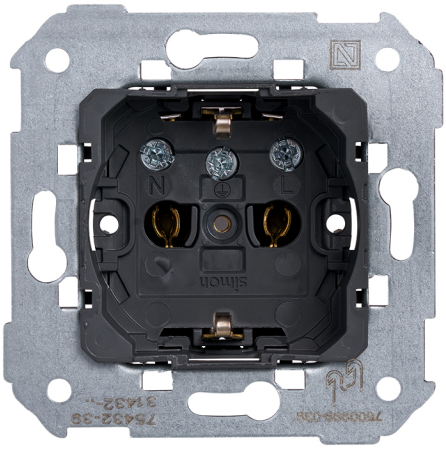
Schuko socket base 16 A 250V~ with screw terminal connection Simon 75

REF. **75432-39**



BASIC INFORMATION

DESCRIPTION

Schuko socket base 16 A 250 V~ Simon 75 with screw terminal connection system, designed to provide a safe and reliable electrical connection in residential and professional installations. It supports a nominal current of 16 amperes at 250 V~, ensuring a stable supply for all types of electrical devices. It incorporates a screw connection system that ensures a firm attachment of the wiring and accommodates cable sections of up to 2.5 mm² with a stripping length of 13 mm for precise installation. The covers include built-in child protection that enhances safety at home. Made with metal components and halogen-free thermoplastic insulation, in accordance with IEC 60884-1 standards, it offers resistance, durability, and high performance within the Simon 75 series and compatible frames.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING CONTENTS

Socket outlet

ETIM CLASS

EC000125

REMARKS

The covers include the child protection function.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
2,5 mm

CONNECTOR TYPE
Schuko

NUMBER OF POSSIBLE ELEMENTS
1 element

FORMAT
Schuko

FREQUENCY
50 Hz

INDICATOR FUNCTION
No

CURRENT (A)
16 A

IP RATING
IP21

LINKABLE
Yes

TYPE OF MECHANISM
Socket

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RECESS DIMENSION (MM)
40

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Single

VOLTAGE (V~)
250 V~

NUMBER OF WIRES
6

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
14

CLAW
Simon 75

REMOVAL OF COVER
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + EN 50581:2012 + IEC 60884-1 Ed 3.2

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053256138

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.074

PRODUCT NET WEIGHT

0.074

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053025390

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

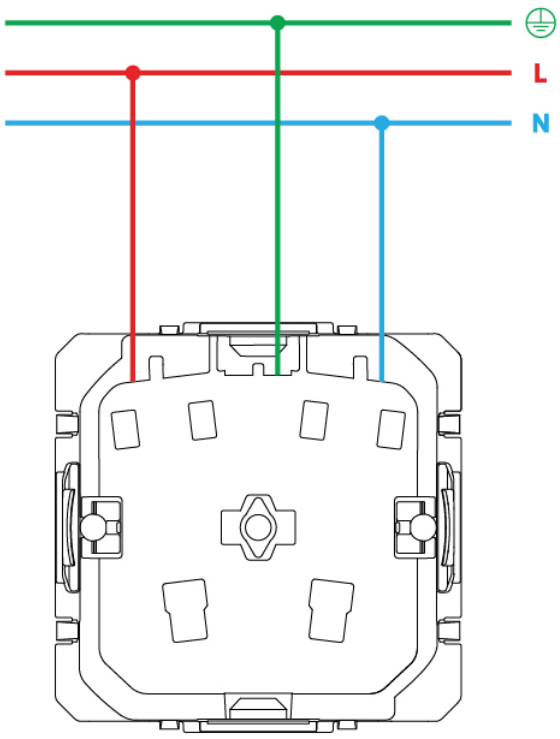
0.74

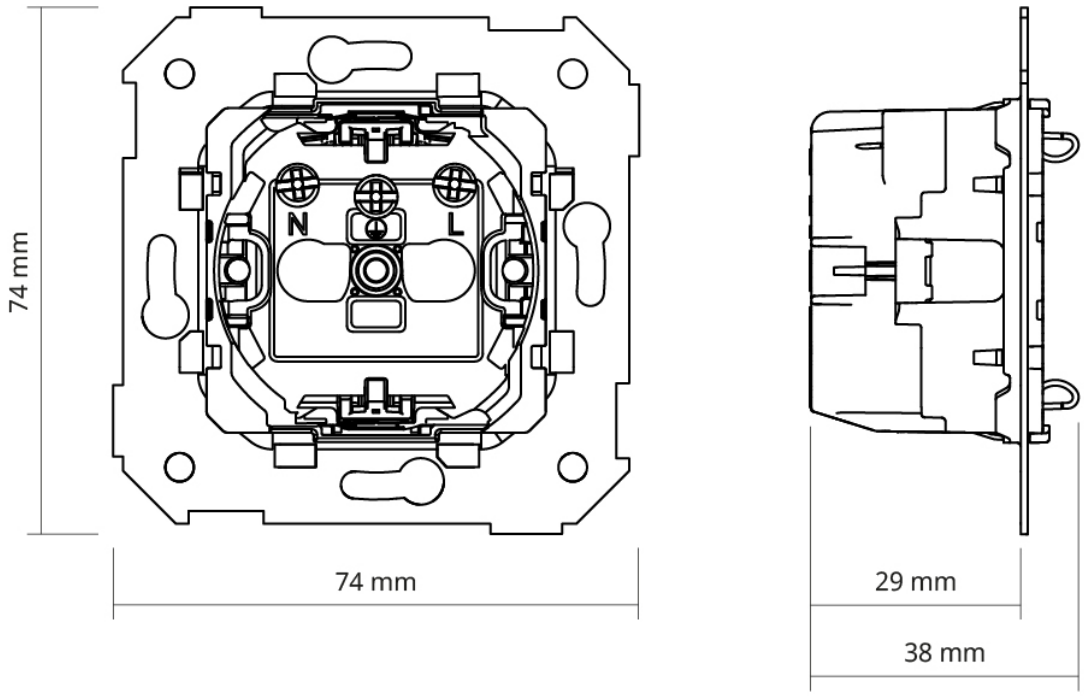
PACKAGING NET WEIGHT

0.74

PACKAGING WEIGHT UNIT

KGM


L
N


74 mm
N
L
74 mm
29 mm
38 mm