

R-TV+Sat signal outlet, intermediate matt white Simon 270

REF. 20000487-190



BASIC INFORMATION

DESCRIPTION

Intermediate R-TV+SAT signal outlet from the Simon 270 series, designed for cascade installations between the single outlet and the end outlet. FM/TV male and SAT female output connector, with IEC shielding and 75 Ω impedance. Made of thermoplastic, it measures 45 x 45 mm. Pass band from 47 to 862 MHz for R-TV and from 950 to 2150 MHz for SAT, with a tap attenuation greater than 25 dB. Suitable for flush mounting in a universal back box, in a horizontal position. Protection rating IP20. Operating temperature range: 5 to 45 °C. Storage temperature range: -25 to 50 °C. Clean with a soft cloth lightly dampened with soapy water, avoiding abrasive or chlorine-based cleaners. Up to 9 available finish colours: 090 Glossy White; 190 Matte White; 091 Copper; 093 Aluminium; 094 Champagne; 095 Gold; 096 Titanium; 097 Bronze; 098 Matte Black.

FINISH

Matt white

COMPATIBILITY

Simon 270 frames

MATERIAL

Thermoplastic

ETIM CLASS

EC000439

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

SAT INSERTION LOSS (MHZ)

5 dB

COMPATIBLE 12V AC/DC

No

MAINTENANCE

Clean with a soft cloth and soapy water. Do not use abrasive cloths and/or cleaners containing chlorine.

TV TAP LOSS (MHZ)

7,5 dB

COMPATIBLE 230V AC/DC

No

SAT TAP LOSS (MHZ)

9 dB

CONNECTOR TYPE

R/TV+SAT

RAL

9003

TAP ATTENUATION (DB)

>25 dB

FORMAT

R/TV,SAT

TV INSERTION LOSS (MHZ)

3,5 dB

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

8

INSTALLATION DIRECTION

Horizontal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 50083-2:2012 + A1:2015 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053315033

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.088

PRODUCT NET WEIGHT

0.088

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053314807

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

55.5

PACKAGING WIDTH

58

PACKAGING LENGTH

280

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

901320

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.88

PACKAGING WEIGHT UNIT


KGM

● INTERMEDIA
20000487-09


○ FINAL
20000488-09x

● UNICA
20000486-09x


En Serie/Cascada

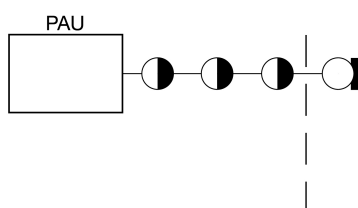


En Estrella




1

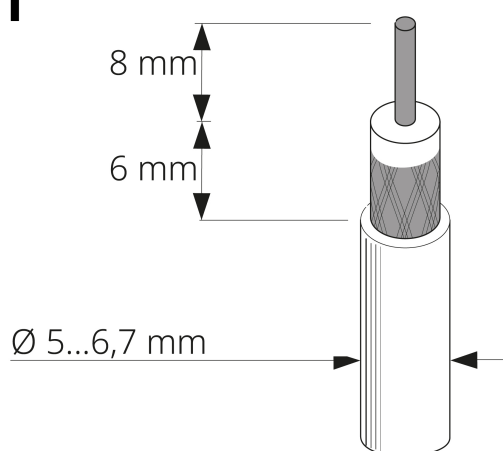


2

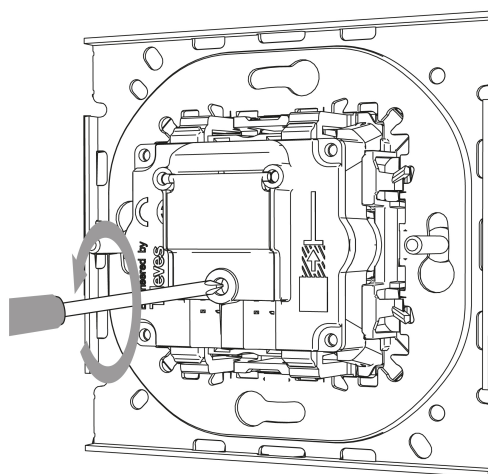

3

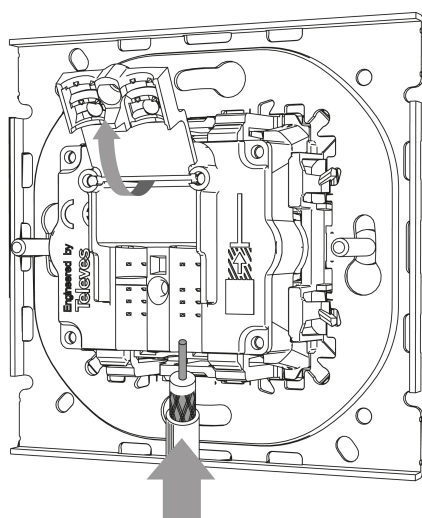

4

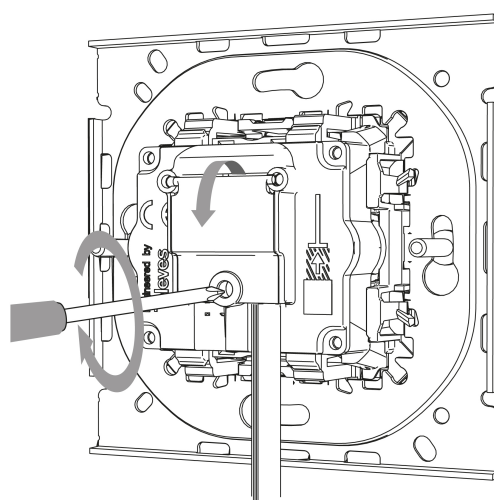

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet