

AC Over Door Heaters



Commercial Products

AC3N, AC3RN, AC45N, AC6N



- Designed for localised heating around open doors
- Can be used as a high level fan heater
- Adjustable airflow direction
- Full heat, Half heat & Fan only settings
- Choice of 3kW, 3kW remote, 4.5kW & 6kW
- All 3kW & 4.5kW models designed for single doors
- 6kW model designed for double doorways

Technical Details

Element: Wire stitched element

Blower Units: Tangential blowers

Control Type: On-board controls (AC3N, AC45N & AC6N)
Additional wireless control for model AC3RN

Control functions: On/off,
Two heat settings (Half heat & Full Heat)
Remote control over On/Off on model AC3RN

Installation: Included wall bracket

Construction / Finish: Pressed steel case with ABS end caps


Cable: None supplied

Approvals: CE , BEAB

Safety: 2 x manual reset cut-outs (supply interrupt type on AC6N)

Warranty: 12 months

Range Details

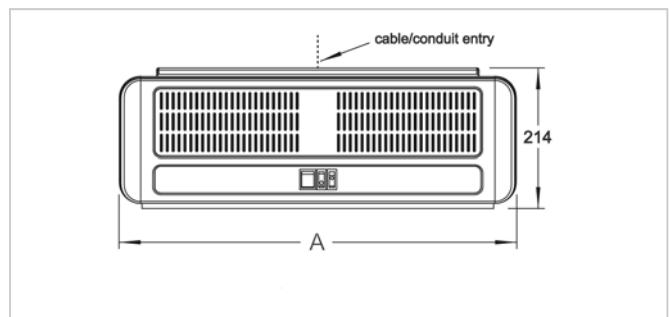

Model	AC3N	AC3RN	AC45N	AC6N
Heat output (kW)	1.5/3.0	1.5/3.0	2.25/4.5	3.0/6.0
Voltage	230V 1PN	230V 1PN	230V 1PN	230V 1PN
Length A (mm)	605	605	605	905
Height (mm)	200	200	200	200
Depth (mm)	135	135	135	135
Air velocity	6.2m/s	6.2m/s	5.5m/s	8.3m/s
Noise dB(A)	50.5	50.5	52.0	57.0
Weight (kg)	5.1	5.3	5.2	7.2

Accessories



Model AC3RN supplied as standard with wireless controller over On/Off Function.

Additional Information

Optimum mounting height 1.8m—2.3m

