



CorePro LEDspot MV



CorePro LEDspot 3-35W GU10 840 36D DIM

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light. They are compatible with most existing fixtures with a GU10 or E14 holder and are designed as a retrofit replacement for halogen or incandescent spots. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data

General Information	
Cap base	GU10
Nominal lifetime	15,000 h
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
Light Technical	
Colour Code	840 [CCT of 4000K]
Beam angle (nom.)	36 degree(s)
Luminous Flux	240 lm
Luminous intensity (nom.)	500 cd
Luminous efficacy (rated) (nom.)	80.00 lm/W
Colour designation	Cool White (CW)
Correlated Colour Temperature	4000 K
Colour consistency	<6
Colour rendering index (CRI)	80
LLMF at end of nominal lifetime (nom.)	70 %
Luminous flux in 90° cone (rated)	240 lm
Flickering value (PstLM)	1
Stroboscopic effect	0.4
Photobiological safety according to EN 62	471 RG1

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz
Power Consumption	3 W
Lamp current (nom.)	18 mA
Wattage equivalent	35 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.8
Voltage (nom.)	220-240 V
Temperature	
T-Case maximum (nom.)	65 ℃
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb shape	PAR16
Approval and Application	
Energy Efficiency Class	F
Suitable for accent lighting	Yes


Datasheet, 2023, April 14 data subject to change

CorePro LEDspot MV

Energy consumption kWh/1,000 hours	3 kWh
EPREL registration number	391906
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Application Conditions	
Can it be used in closed luminaires	No
Product Data	
Order product name	CorePro LEDspot 3-35W GU10 840 36D
	DIM


Full product name	CorePro LEDspot 3-35W GU10 840 36D
	DIM
Full EOC	871869673022500
Order code	73022500
Material no. (12 NC)	929002065602
Numerator – quantity per pack	1
Net Weight (Piece)	0.048 kg
EAN/UPC — Product/Case	8718696730225
Numerator – packs per outer box	10
EAN/UPC - Case	8718696730232

Dimensional drawing




Product	D	С
CorePro LEDspot 3-35W GU10 840 36D DIM	50 mm	54 mm

Photometric data



Cliculus Processories 4.5 Philips Lighting 6.V. Regio: UT


Accent Lighting Spots - CorePro LEDspot 3-35W GU10 840 36D DIM



Light Distribution Diagram - CorePro LEDspot 3-35W GU10 840 36D DIM


CorePro LEDspot MV


Photometric data

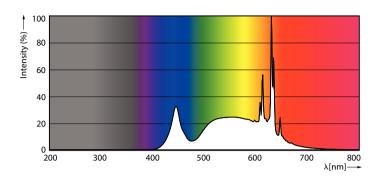

Spectral Power Distribution Colour - CorePro LEDspot 3-35W GU10 840 36D DIM

Lifetime

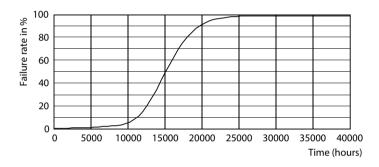

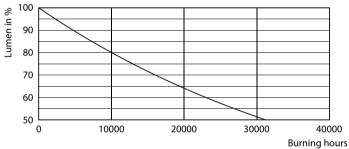

Life Expectancy Diagram

Lumen Maintenance Diagram - CorePro LEDspot 3-35W GU10 840 36D DIM



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.