



CorePro Plastic LED Specialities



Corepro LED T25 ND 3.2-25W E14 827

The LED specialities can be easily installed for certain applications.

Product data

General information	
Cap base	E14 [E14]
EU RoHS compliant	Yes
Nominal lifetime (nom.)	15000 h

Light technical	
Colour Code	827 [CCT of 2,700 K]
Beam Angle (Nom)	160 °
Luminous flux (nom.)	250 lm
Colour designation	Warm white (WW)
Correlated Colour Temperature (Nom)	2700 K
Luminous efficacy (rated) (nom.)	78.00 lm/W
Colour consistency	<6
Colour rendering index (nom.)	80
LLMF at end of nominal lifetime (nom.)	70 %

Operating and electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	3.2 W
Lamp current (nom.)	35 mA
Wattage equivalent	25 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s

Power factor (nom.)	0.4
Voltage (Nom)	220-240 V

Temperature	
T-Case maximum (nom.)	80 °C

Controls and dimming	
Dimmable	No

Mechanical and housing	
Lamp Finish	Frosted
Bulb shape	T25 [T 25mm]

Approval and application	
Energy Efficiency Class	G
Energy consumption kWh/1,000 hours	4 kWh 391880


Product data	
Full product code	871951438984700
Order product name	Corepro LED T25 ND 3.2-25W E14 827
EAN/UPC – product	8719514389847
Order code	38984700

CorePro Plastic LED Specialities

SAP numerator – quantity per pack	1
Numerator – packs per outer box	12
SAP material	929001325802

Net Weight (Piece)	0.012 kg
--------------------	----------


Dimensional drawing




Corepro LED T25 ND 3.2-25W E14 827

Product	D	C
Corepro LED T25 ND 3.2-25W E14 827	25 mm	71 mm


Photometric data

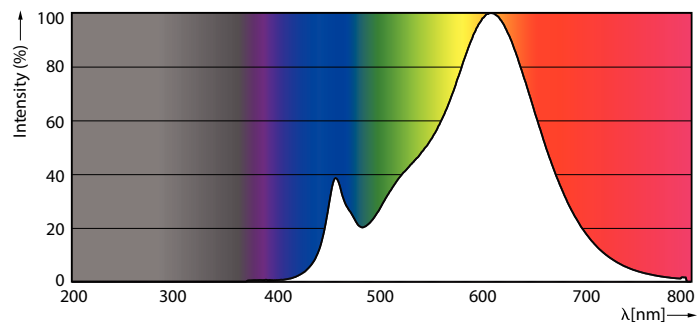

CorePro LEDcapsule MV 35W G9 827 Capsule

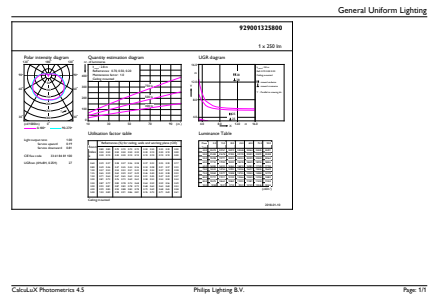


LEDCandle 25W E14 T25 Frosted 827 16D ND




LEDCandle 25W E14 T25 Frosted 827 16D ND

CorePro Plastic LED Specialities

Lifetime

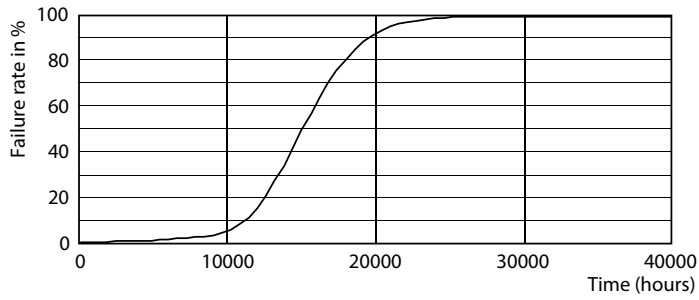

LEDCandle 25W E14 T25 Frosted 827 16D ND

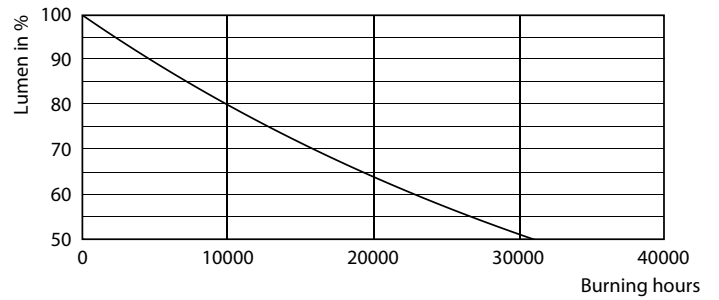

LEDCandle 25W E14 T25 Frosted 827 16D ND

