



MASTER GLASS LED candles and lustres

MAS LEDCandleDT3.4-40WE14 927B35CLGUK

Featuring a classic heritage design, Classic filament LED Lamps combine the familiar shapes of incandescent candles and lustres with the benefits of the long-lasting LED technology. It is an idea product to provide customers with cosy atmosphere. The MASTER LED candles and lustres can be dimmed for different lumen level and also for the different colour temperature. MASTER Glass Led Bulbs deliver significant energy savings, offering even 30% more compared to normal LED. They provide excellent quality of light. By offering a lifetime of 25,000 hours, the lamps reduce maintenance costs.

Product data

General information	
Cap base	E14 [E14]
EU RoHS compliant	Yes
Nominal lifetime (nom.)	25000 h
Switching cycle	20,000X
	Sphere
Light technical	
Colour Code	922-927 [CCT of 2,200 K-2,700 K]
Luminous flux (nom.)	470 lm
Colour designation	Warm Glow (WG)
Correlated Colour Temperature (Nom)	2200 2700 K
Luminous efficacy (rated) (nom.)	138 lm/W
Colour consistency	<6
Colour rendering index (nom.)	90
LLMF at end of nominal lifetime (nom.)	70 %

Operating and electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	3.4 W
Lamp current (nom.)	24 mA
Wattage equivalent	40 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.6
Voltage (Nom)	220-240 V
Temperature	
T-ambient (max.)	45 °C
T-ambient (min.)	-20 °C
T-Case maximum (nom.)	70 °C

MASTER GLASS LED candles and lustres

Controls and dimming

Dimmable Only with specific dimmers

Mechanical and housing

Lamp Finish Clear
Bulb material Glass
Bulb shape B35 [B 35mm]


Approval and application

Energy Efficiency Class D
Energy consumption kWh/1,000 hours 4 kWh
 1109139

Product data

Full product code 871951446661600
Order product name MAS LEDCandleDT3.4-40WE14 927B35CLGUK
EAN/UPC – product 8719514466616
Order code 46661600
SAP numerator – quantity per pack 1
Numerator – packs per outer box 10
SAP material 929003012242
Net Weight (Piece) 0.013 kg


Dimensional drawing

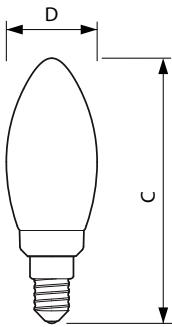


MAS LEDCandleDT3.4-40WE14 927B35CLGUK

Product	D	C
MAS LEDCandleDT3.4-40WE14 927B35CLGUK	35 mm	97 mm

Photometric data




Light Distribution Diagram

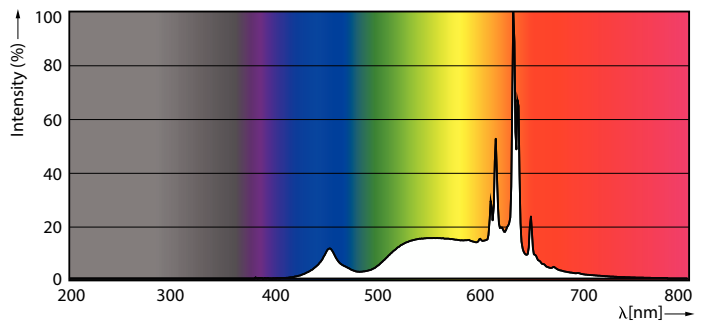

Spectral Power Distribution Colour

MASTER GLASS LED candles and lustres

Photometric data




© Philips Lighting B.V. 2022. Philips Lighting B.V. Page 11

General uniform lighting

Lifetime



Life Expectancy Diagram

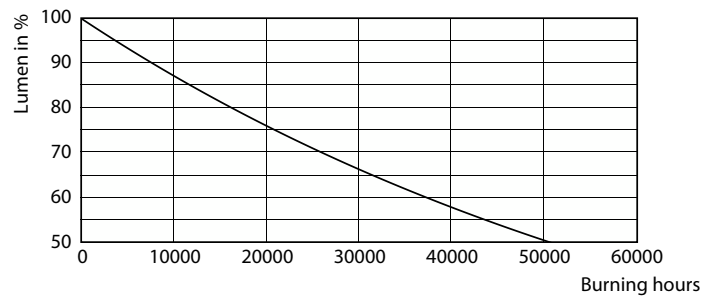

Lumen Maintenance Diagram

