




The look of highly-fashionable safety eyewear! Riley ASPINI™ is the result of modern relaxed styling, lightweight tortoiseshell TR90 frame materials and a comfort-fit nose bridge.

SPECIAL FEATURES

- ✓ Contemporary design
- ✓ Lightweight tortoiseshell TR90 frame
- ✓ Unique comfort-fit nose bridge pads
- ✓ Supplied with a microfibre storage pouch

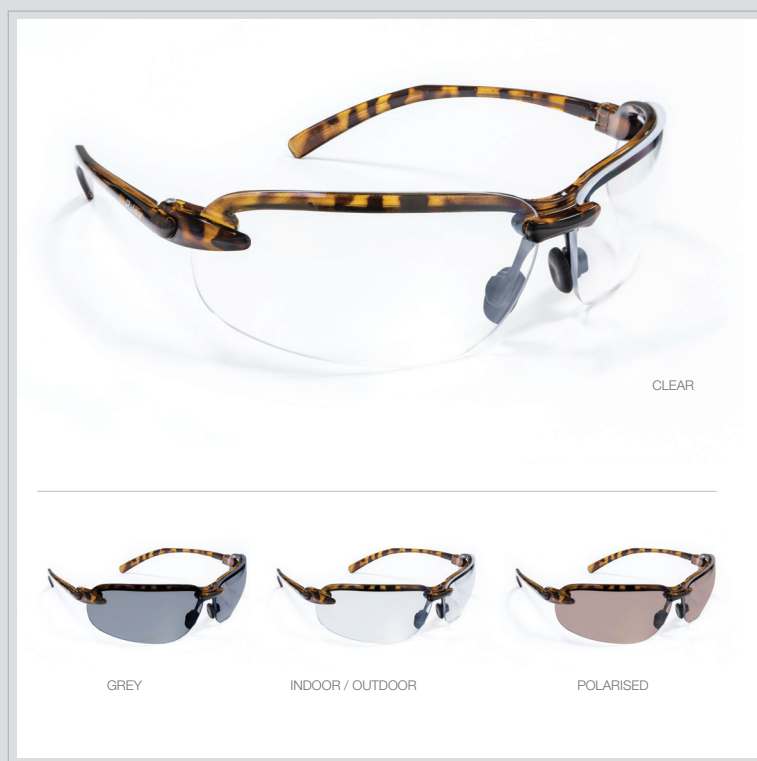

VERSIONS	REF.	LENS MARKING	FRAME MARKING	PROTECTION AGAINST	COATINGS
CLEAR	○ RLY00261	2C-1.2 1FTKN CE	EN 166 FT CE	Impacts, UV radiations	 K&N Anti-scratch and Anti-fog / UV400 / Moisture repellent
GREY	● RLY00262	5-2.5 1FTKN CE	EN 166 FT CE	Impacts, UV and Solar radiations	
INDOOR/OUTDOOR	◐ RLY00263	5-1.7 1FT CE	EN 166 FT CE	Impacts, UV radiations	
POLARISED	○ RLY00264	5-2.5 1FT CE	EN 166 FT CE	Impacts, UV and Solar radiations	

See overleaf for this product's technical specification 

GENERAL SPECIFICATION

LENS BASE	9mm
WEIGHT	26g

PACKAGING

Individually contained in a polythene bag with a Euroslot

PER BOX	10
PER CARTON	200

COMPONENT SPECIFICATION

COMPONENT	MATERIAL	FEATURES
LENS	Polycarbonate	Dual lens design
NOSE BRIDGE	Thermoplastic Elastomers (TPE)	Comfortable and flexible
TEMPLE	TR90 Thermoplastic	Lightweight
HINGE	Metal	Increased strength

LENS MARKINGS

LENS FILTER TYPE:

- 2C UV
- 5 Solar

SCALE NUMBER (SHADE):

- 1.2 Clear or Amber
- 1.7 Minimises or I/O
- 2.5 Grey

Identity of the manufacturer

OPTICAL CLASS:

- 1 High optical quality

MECHANICAL STRENGTH:

- F Low energy impact, resists a 6mm, 0.86g ball at 45m/s
- T Protection against high-speed particles at extreme temperatures

PERFORMANCE:

- K Resistance to scratches by fine particles
- N Resistance to fogging

Certification mark

FRAME MARKINGS

Identity of the manufacturer

EN 166: guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

MECHANICAL STRENGTH:

- F Low energy impact, resists a 6mm, 0.86 g ball at 45 m/s
- T Protection against high-speed particles at extreme temperatures

Certification mark

CLEANING AND STORAGE

CLEANING: The lenses should be cleaned regularly.

MAINTENANCE: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfibre pouch or rigid case.

STORAGE: All products must be stored in a dry and clean environment.

PART OF THE GLOBUS GROUP

Based on a substantial heritage of successfully protecting hands, Globus has grown to become one of the world leaders in worker safety, leading the way in technical innovation to provide a range of products that have set the standard for safety, productivity and wearer acceptance.

This focus on creating cutting edge personal protection solutions has now extended to eye and face protection with Riley; a new collection of high performance protective eyewear products engineered with innovation and ingenuity, designed for optimum comfort and styled for safe working.

Riley product approval certificates to CE standards will be provided on request. Riley is a registered trademark.

www.riley-eyewear.com

E: info@riley-eyewear.com

T: +44 (0)161 877 4747

F: +44(0)161 877 4746

Globus (Shetland) Ltd, 14 Central Park, Mosley Road, Manchester, M17 1NY, UNITED KINGDOM

