


# Type A+ Eco Element

## Technical Drawing

41.0581 / 41.0582 / 41.0583  
 41.0584 / 41.0585 / 41.0586  
 41.0587 / 41.0588 / 41.0589

NO TOLERANCES		DO NOT SCALE DRAWING REMARKS: TOWER WARMER HEATER
SIZE	TOLERANCE	
6	0.05	
18	0.10	
50	0.15	
80	0.21	
180	0.30	

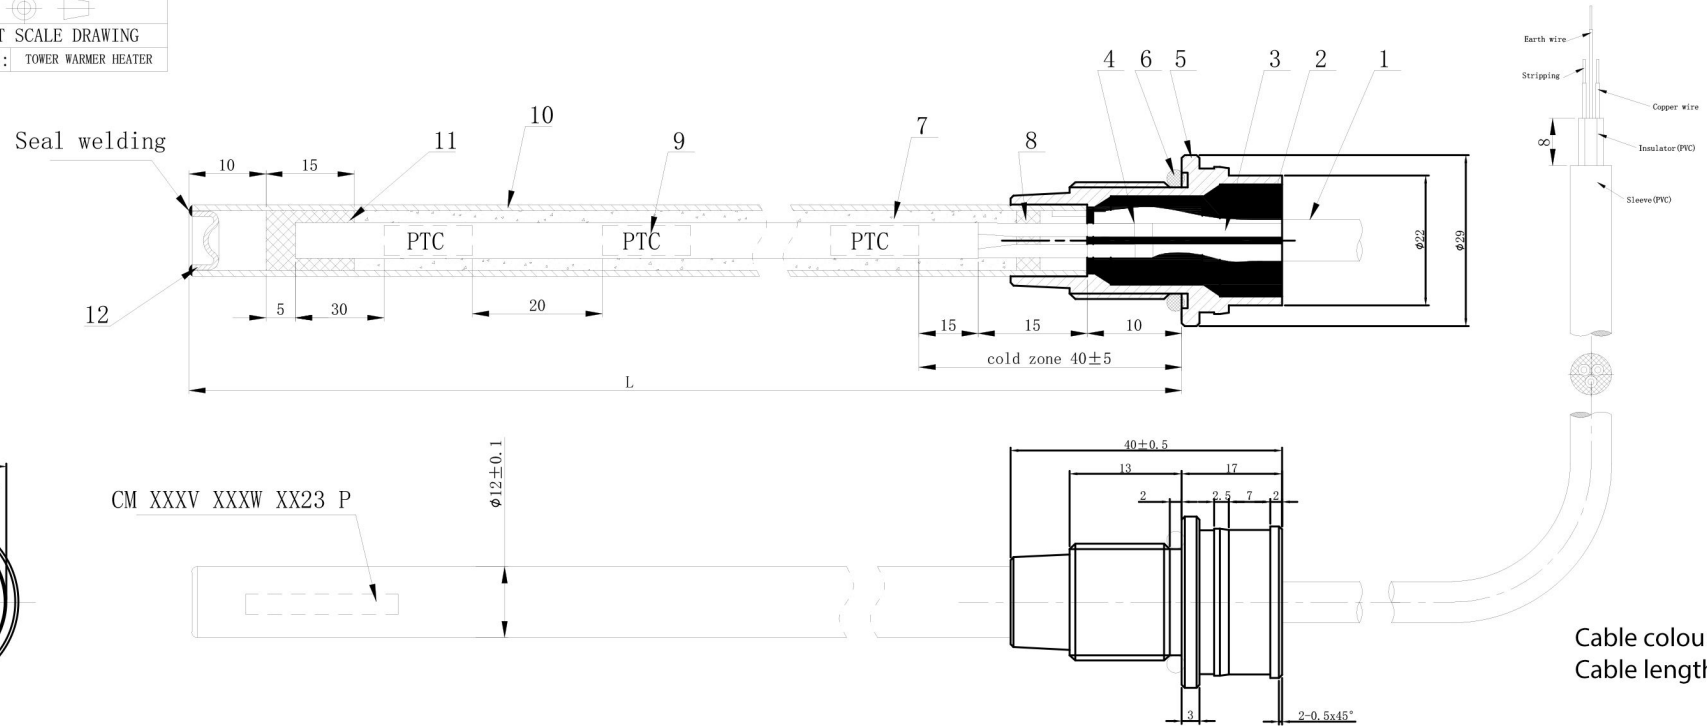

Cable colour : White  
 Cable length : 1.5 metre

Power <sup>+5%</sup> -10%	Length	straightness
230V 100W	135 ± 5	≤ 3mm
230V 150W	170 ± 5	≤ 3mm
230V 300W	250 ± 5	≤ 3mm
230V 450W	350 ± 8	≤ 5mm
230V 600W	470 ± 10	≤ 5mm
230V 750W	590 ± 10	≤ 5mm
230V 900W	690 ± 10	≤ 5mm
230V 1000W	760 ± 10	≤ 5mm
230V 1200W	910 ± 10	≤ 5mm

12	Cap	AISI304	
11	silicone		
10	Tube	AISI304	∅12
9	PTC		
8	silicone		
7	magnesium powder		
6	O-ring		∅24*3
5	Flange	Nickel plated steel	FL10122B
4	Extraction rod	Nickel plated steel	
3	earth wire		
2	Sealing material	silicone	
1	Power cord		7 outer dia 1.5m L

**Eastbrook**

Eastbrook Road, Gloucester GL4 3DB

Technical Helpline : 01452 317890

Mon - Fri / 8am - 5pm

Email : [technical@eastbrookco.com](mailto:technical@eastbrookco.com)