


24.0003 - Belgravia 1TH Basin

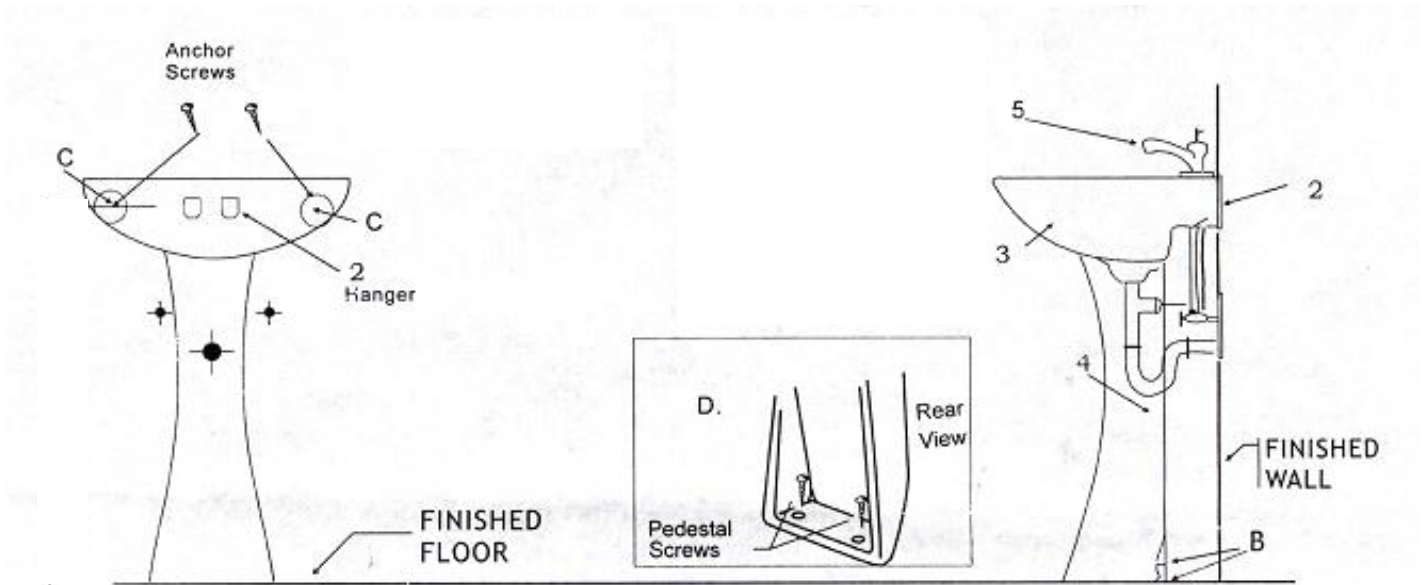

Installation

- With a pencil, mark the location of the pedestal on the finished floor by tracing around the pedestal foot. Mark the basin height and sides. If supplied, slide the hanger support up behind the basin until it contact the china and mark the holes with a pencil.
- Remove the basin and pedestal. Bore pilot holes into the markings made earlier. These holes will be used for the lag screws that will hold the hanger, (2), in place. Note: models are not all supplied with bolts, anchor screws and steel hangers. Various bolt size for numerous installations are available.
- Install the tap, (5) onto the basin, (3), per the tap manufactures instructions. It is easier to install it before the basin is installed on the pedestal and against the finished wall.
- Place the basin, (3) on top of the pedestal, (4) and gently slide back both toward the wall and to the pedestal outline made on the finished floor. Lift the basin on top of the hanger, if supplied. Some basins have anchor holes located on the back sides of the basin, location C above. Bolts with washers sized to fit into these holes should be installed and tightened to prevent the basin from lifting off the wall. A pilot hole may need to be drilled to securely anchor the bolts. Make sure the basin is levelled before tightening these bolts.
- Drill holes through the pedestal foot, (5), into the finished floor, per (B) above. Anchor the pedestal leg down to the floor using washers and bolts (not supplied). See D above.

- Connect the drain assembly and trap as well as the hot and cold water supply lines. Check for leaks.

Care & Maintenance

All ceramic products should be cleaned regularly with warm soapy water. They can then be rinsed and if desired, dried and polished with a soft cloth; regular cleaning will prevent the build-up of soluble salts. Some proprietary cleaners can damage the glazed surface and we strongly recommend that the instructions on the bottle of your chosen cleaner are followed. We advise against the practise of leaving strong cleaners in or on the ceramic products overnight since the glazed surface can be damaged.

Helpline:- 01452 317890

Mon –Fri 8.00-5.00