

#### **OPTIONS**

#### Flow Rate

1.5 gpm (5.7 Lpm) (1.5GPM) 0.5 gpm (1.9 Lpm) (0.5GPM)

# **Spray Type**

Multi-Laminar (MLM)
Aerated (installed) or Laminar (in box)

### Mixer


Back-Check Tee (TEE)
Integrated Side Mixer (ISM)

### **NOTES**

For product line drawings, view model-specific spec sheets.

All information contained within this document subject to change without notice.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

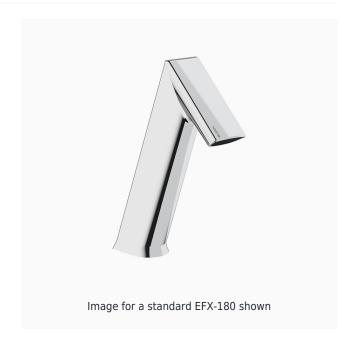

# **DESCRIPTION**

BASYS® Turbine-Powered Deck-Mounted High Body

#### **FEATURES**

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Die-Cast Metal Hand Washing Faucet with the following features:

- One tool service
- All wetted components to be stainless steel, engineered thermoplastic, EPDM, and copper or copper alloy
- Solenoid housed in removable carrier that includes supply strainer
- Integral water supply shut off
- Supply strainer serviceable from above deck
- Vandal resistant spray insert, key housed inside faucet body
- All electronics sealed to IP-67
- Gold plated electrical contacts
- Above deck individual diagnostic indicators for battery life, solenoid condition, and power up mode
- Flexible, high pressure supply hoses, 3/8" compression connections
- Bi-stable magnetic solenoid
- Four (4) "AA" alkaline batteries
- Double infrared sensors with automatic setting feature
- Single hole installation
- Includes all mounting hardware
- Line purge mode, eliminates stagnant water
- Adjustable time-outs
- 3 year limited warranty

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



# **DOWNLOADS**

- EFX 1Xx/2Xx Installation Instructions
- EFX 1Xx/2Xx (SP) Installation Instructions
- EFX 1Xx/2Xx Caddy Replacement Installation Instructions
- EFX-1XX Repair and Maintenance Guide
- Trim Plate Guide
- Faucet Spray Heads Repair and Maintenance Guide
- IR FAQs SP Repair and Maintenance Guide
- IR FAQs Repair and Maintenance Guide
- Additional Downloads

### **VIDEOS**



Sloan Connect App®