

OPTIONS

Flush Volume

- 0.5 gpf (1.9 Lpf) (0.5)
- 1.0 gpf (3.8 Lpf) (1.0)
- 1.5 gpf (5.7 Lpf) (1.5)

Water Efficiency

- High Efficiency
- Low Consumption
- Water Saver

Compliances & Certifications

- ADA Compliant
- BAA Compliant
- BABAA Compliant
- UPC Certified
- cUPC Certified
- BREEAM Water Credit
- Green Globes Water Credit
- LEED V4 Water Efficiency Credit
- Satisfies LEED Credits
- WaterSense Listed

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

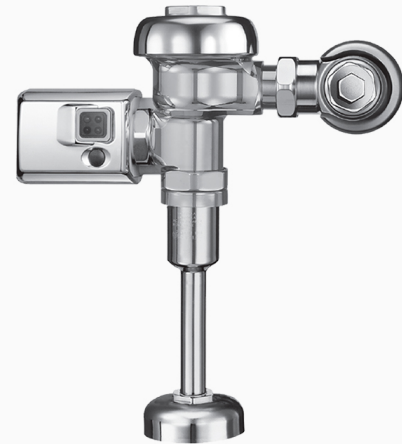


Image for a standard REGAL 186 SMO shown

DESCRIPTION

Regal® Exposed Sensor Urinal Flushometer

FEATURES

- Flush volumes start as low as 0.5 gpf/1.9 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents urinal from exceeding intended flush volume
- Low Consumption flush accuracy controlled by Para-Flo™ technology
- Integrity of the product is maintained with control stop plug
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Optima SMO Installation Instructions](#)
- [Regal XL Exposed Installation Instructions](#)
- [Regal XL Exposed \(SP\) Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Regal Flushometers Repair and Maintenance Guide](#)
- [EBV-89A Side Mount Repair and Maintenance Guide](#)
- [Additional Downloads](#)