

Technical Data Sheet

Ref: TDS-01-RWS-01


Screws

Rainwater Screws - PZ - Low Profile Pan - Exterior

Features

- Specifically designed for the fitting of brackets and clips during the installation of PVCu rainwater systems.
- Low profile pan head to assist clamping performance.
- Single slash point for low torque and reduced timber splitting when the screw is inserted close to the edge.
- When fixing into brick, a brown (7mm) or red (5.5) plug is needed.
- Partially threaded with a deep single thread to provide a secure fixing with high pull-out resistance.
- Organic exterior coating (black or white) for superior corrosion resistance. Salt spray tested up to 1000 hours.

Dimensional Data

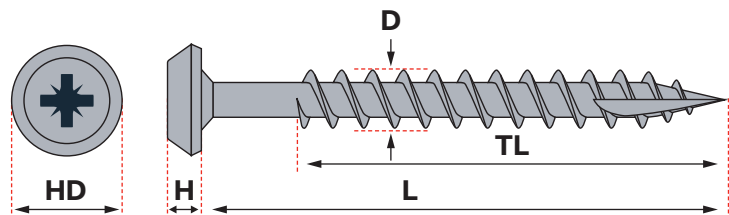

Product Code	Colour	Recess	Size (mm) (D x L)	Head Diameter Ø (mm) (HD)	Head Height (mm) (H)	Thread Length (mm) (TL)
40040CLARB	Black	PZ2	4.0 x 40	8.0	2.5	30.0
50025CLARB	Black	PZ2	5.0 x 25	10.0	3.0	19.0
60040CLARB	Black	PZ3	6.0 x 40	12.0	3.5	30.0
40040CLARW	White	PZ2	4.0 x 40	8.0	2.5	30.0
50025CLARW	White	PZ2	5.0 x 25	10.0	3.0	19.0
60040CLARW	White	PZ3	6.0 x 40	12.0	3.5	30.0

All stated figures (mm) are approx and for reference only.