


Field Gate Hinge Sets



Standard Double Strap Hinge Set

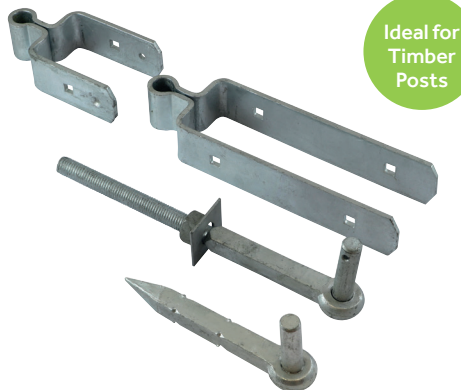

Ideal for
Timber
Posts

Ideal for use on field gates and driveway gates that are to be hung on timber posts. The hinge set provides exceptional support to the gate as the top band and bottom strap wrap around the gate and are fixed with cup square bolts to firmly secure in place.

The hook to bolt features a 9mm drilled hole for R clips or linch pins (not included) to be fitted to prevent the gate being lifted off. The hooks to drive are barbed to prevent the gate from working loose.

Depending on the weight distribution of the gate, the top or bottom pin can be mounted upside down to prevent unwanted removal of the gate.

Contents:

1 x Top Strap
1 x Bottom Strap
1 x Hook to Drive
1 x Hook to Bolt
M10 x 95mm Galvanised Cup Square Bolts
M10 Hex Nuts & Washers
6.0 x 40mm Exterior Woodscrews

Field Gate Information			
To Suit Gate Width	3 - 4ft/ 900 - 1200mm	4 - 9ft/ 1200 - 2700mm	9 - 12ft/ 2700 - 3600mm
To Suit Gate Thickness	3" / 75mm	3" / 75mm	3" / 75mm


Product Dimensions			
Top Strap Length	12" / 300mm	18" / 450mm	24" / 600mm
Bottom Strap Length	6" / 150mm	6" / 150mm	6" / 150mm
Hook To Bolt Ø x Length (mm)	M20 x 350	M20 x 350	M20 x 350
Hook To Drive Length (mm)	215	215	215
Pin Ø	3/4" / 19mm	3/4" / 19mm	3/4" / 19mm

Fixings Information			
No. of Carriage Bolts	3	4	4
Carriage Bolt Ø (mm)	M10	M10	M10

Product Code	Top Strap Length (inch)	Top Strap Length (mm)	To Suit Gate Width (ft)	To Suit Gate Width (mm)	Pack Qty (pcs)	Carton Qty (packs)
Hot Dipped Galvanised						
BAG - FIXINGS INCLUDED						
SFH300G	12	300	3 - 4	900 - 1200	1	4
SFH450G	18	450	4 - 9	1200 - 2700	1	4
SFH600G	24	600	9 - 12	2700 - 3600	1	4

FGS01

Double Strap Hinge Set with Hook on Plate

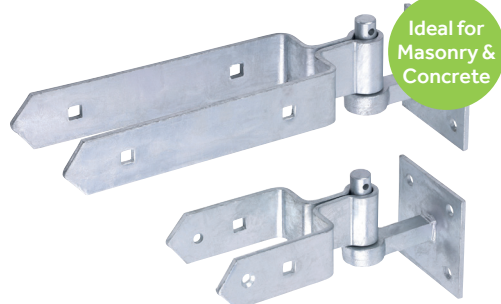

Ideal for
Masonry &
Concrete

Ideal for use on field gates and driveway gates that are to be hung on timber, concrete or masonry posts.

The hinge set provides exceptional support to the gate as the top band and bottom strap wrap around the gate and are fixed with cup square bolts to firmly secure in place.

Depending on the weight distribution of the gate, the top or bottom pin can be mounted upside down to prevent unwanted removal of the gate.

Contents:

1 x Top Strap
1 x Bottom Strap
2 x Hook on Plates
M10 x 95mm Galvanised Cup Square Bolts
M10 Hex Nuts & Washers
M10 x 65mm Galvanised Coach Screws
6.0 x 40mm Exterior Woodscrews

Field Gate Information			
To Suit Gate Width	3 - 4ft/ 900 - 1200mm	4 - 9ft/ 1200 - 2700mm	9 - 12ft/ 2700 - 3600mm
To Suit Gate Thickness	3" / 75mm	3" / 75mm	3" / 75mm

Product Dimensions			
Top Strap Length	12" / 300mm	18" / 450mm	24" / 600mm
Bottom Strap Length	6" / 150mm	6" / 150mm	6" / 150mm
Hook on Plate Length x Width (mm)	100 x 100	100 x 100	100 x 100
Pin Ø	3/4" / 19mm	3/4" / 19mm	3/4" / 19mm

Fixings Information			
No. of Coach Screws	8	8	8
Coach Screws Ø (mm)	M10	M10	M10
No. of Carriage Bolts	3	4	4
Carriage Bolt Ø (mm)	M10	M10	M10

Product Code	Top Strap Length (inch)	Top Strap Length (mm)	To Suit Gate Width (ft)	To Suit Gate Width (mm)	Pack Qty (pcs)	Carton Qty (packs)
Hot Dipped Galvanised						
BAG - FIXINGS INCLUDED						
DSFH300G	12	300	3 - 4	900 - 1200	1	4
DSFH450G	18	450	4 - 9	1200 - 2700	1	4
DSFH600G	24	600	9 - 12	2700 - 3600	1	4

FGS01