

Stainless Steel 2 Piece Full Bore Ball Valve

- Full bore
- BSPP threads
- Investment casting
- Blowout proof stem
- Locking lever or wing handle for sizes 1/4" to 1/2"




	Part Description	Material
1	Body	SS 316
2	Cap	
3	Ball	
4	Gasket	PTFE
5	Seat	
6	Thrust Washer	PTFE
7	Stem Packing	
8	Gland Nut	SS 304
9	Stem Washer	SS
10	Stem	ASTM A182-F304
11	Stem Nut	SS
12	Locking Device	SS 201
13	Handle	
14	Plastic Cover	Plastic



Working Temperature:
-20°C to +200°C



Maximum Working
Pressure:
63 bar

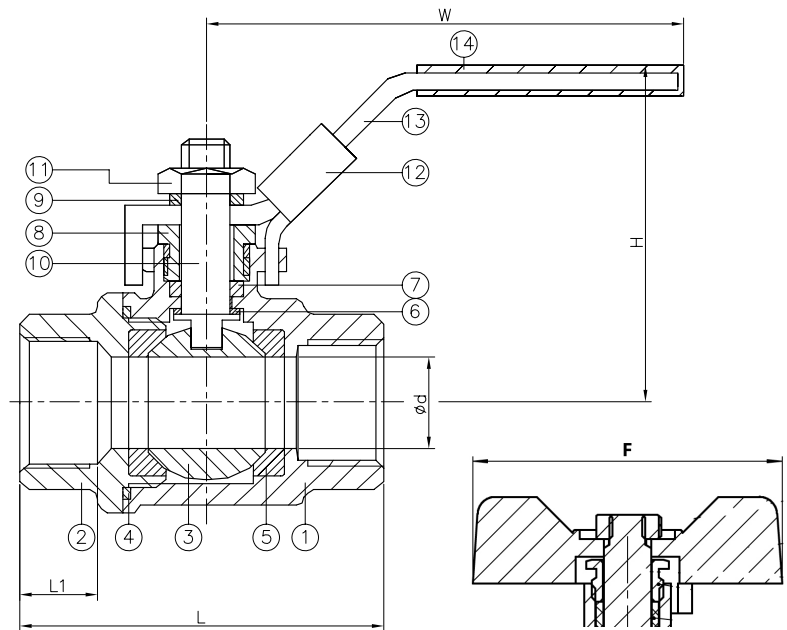

Dimensions

Size	DN	Ød	F	L	L1	H	W	Kg
1/4"	8	12	51	52	9	51	96	0.20
3/8"	10	12	51	52	11	51	96	0.20
1/2"	15	15	62	55	11	52	96	0.20
3/4"	20	20	-	62	13	59	110	0.30
1"	25	25	-	74	16	72	133	0.50
1.1/4"	32	32	-	82	14	78	133	0.80
1.1/2"	40	38	-	91	15	88	172	1.10
2"	50	49	-	105	15	96	172	1.50
2.1/2"	65	65	-	144	25	125	220	3.60
3"	80	78	-	168	30	138	245	5.50

Stainless Steel 2 Piece Full Bore Ball Valve

